YongXing Terminial Blocks

目录

YA

NO.	YA321-500	YA321-100	YA331-500M	YA331-100M		
Photo						
Pitch.	5.00mm	10.00mm	5.00mm	10.00mm		
Poles.	2~27poles	2~27poles	2~3poles	2~3poles		
Approval.	cac	cac	cac	cac		
Rating.	10Amp AC300V	10Amp AC300V	10Amp AC300V	10Amp AC300V		
Page.	10	10	11	11		

YB

NO.	YB312-500M	YB312-508M	YB312-762M	YB322-500M	YB322-508M	YB332V-350M
Photo						
Pitch.	5.00mm	5.08mm	7.62mm	5.00mm	5.08mm	3.50mm
Poles.	2~3poles	2~3poles	2~3poles	2~3poles	2~3poles	2~3poles
Approval.	cac	cac	cac	cac	cac	cac
Rating.	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	10Amp AC300V
Page.	12	12	12	12	12	13

YB332A-381M	YB332B-381M	YB362-381M	YB362-500M	YB362-508M	YB372-500M	YB372-508M
						
3.81mm	3.81mm	3.81mm	5.00mm	5.08mm	5.00mm	5.08mm
2~3poles	2~3poles	2~3poles	2~3poles	2~3poles	2~3poles	2~3poles
cac	cac	cac	cac	cac	cac	cac
10Amp AC300V	10Amp AC300V	10Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
13	14	14	15	15	15	15

YB422A-508M	YB422B-508M	YB432-508M	YB522-500	YB522-508	YB612-508M	YB622-508M
						
5.08mm	5.08mm	5.08mm	5.00mm	5.08mm	5.08mm	5.08mm
2~3poles	2~3poles	2~3poles	2~6poles	2~6poles	2~3poles	2~3poles
cac	cac	cac	cac	cac	cac	cac
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
16	16	17	17	17	18	18

YongXing Terminial Blocks

YB912-635M	YB912-762M	YB912-952M				
						
6.35mm	7.62mm	9.52mm				
2 ~ 3poles	2 ~ 3poles	2 ~ 3poles				
cec	cec	cec				
30Amp AC300V	30Amp AC300V	30Amp AC300V				
19	19	20				

YC

NO.	YC420-350	YC420-381	YC421-350	YC421-381	YC060-350	YC060-381
Photo						
Pitch.	3.50mm	3.81mm	3.50mm	3.81mm	3.50mm	3.81mm
Poles.	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles
Approval.	cec	cec	cec	cec	cec	cec
Rating.	10Amp AC300V	10Amp AC300V	10Amp AC300V	10Amp AC300V	10Amp AC300V	10Amp AC300V
Page.	21	21	21	21	22	22



YC061-350	YC061-381	YC070-350	YC070-381	YC071-350	YC071-381	YC100-500
						
3.50mm	3.81mm	3.50mm	3.81mm	3.50mm	3.81mm	5.00mm
2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles
cec	cec	cec	cec	cec	cec	cec
10Amp AC300V	10Amp AC300V	10Amp AC300V	10Amp AC300V	10Amp AC300V	10Amp AC300V	16Amp AC300V
22	22	23	23	23	23	24

YC100-508	YC101-500	YC101-508	YC010-500	YC010-508	YC011-500	YC011-508
						
5.08mm	5.00mm	5.08mm	5.00mm	5.08mm	5.00mm	5.08mm
2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles
cec	cec	cec	cec	cec	cec	cec
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
24	24	24	25	25	25	25

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081

YongXing Terminial Blocks

YC020–500	YC020–508	YC021–500	YC021–508	YC030–508	YC031–508	YC040–508
						
5.00mm	5.08mm	5.00mm	5.08mm	5.08mm	5.08mm	5.08mm
2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles
cqc	cqc	cqc	cqc	cqc	cqc	cqc
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
26	26	26	26	27	27	28

YC041–508	YC050–508	YC051–508				
						
5.08mm	5.08mm	5.08mm				
2 ~ 24poles	2 ~ 24poles	2 ~ 24poles				
cqc	cqc	cqc				
16Amp AC300V	16Amp AC300V	16Amp AC300V				
28	29	29				

YE

NO.	YE010–500	YE010–508	YE020–500	YE020–508	YE030–500	YE030–508
Photo						
Pitch.	5.00mm	5.08mm	5.00mm	5.08mm	5.00mm	5.08mm
Poles.	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles
Approval.	cqc	cqc	cqc	cqc	cqc	cqc
Rating.	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
Page.	30	30	30	30	31	31

YE040–500	YE040–508	YE050–500	YE050–508	YE060–500	YE060–508	YE430–350
						
5.00mm	5.08mm	5.00mm	5.08mm	5.00mm	5.08mm	3.50mm
2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles
cqc	cqc	cqc	cqc	cqc	cqc	cqc
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	12Amp AC300V
31	31	32	32	32	32	33

YongXing Terminial Blocks

YE430–381	YE440–350	YE440–381	YE450–350	YE450–381	YE460–350	YE460–381
						
3.81mm	3.50mm	3.81mm	3.50mm	3.81mm	3.50mm	3.81mm
2～24poles	2～24poles	2～24poles	2～24poles	2～24poles	2～24poles	2～24poles
CQC	CQC	CQC	CQC	CQC	CQC	CQC
12Amp AC300V	12Amp AC300V	12Amp AC300V	12Amp AC300V	12Amp AC300V	12Amp AC300V	12Amp AC300V
33	33	33	34	34	34	34

YE110–500M	YE110–508M	YE120–500M	YE120–508M	YE130–500	YE130–508	YE13L–500M
						
5.00mm	5.08mm	5.00mm	5.08mm	5.00mm	5.08mm	5.00mm
2～3poles	2～3poles	2～3poles	2～3poles	2～24poles	2～24poles	2～3poles
CQC	CQC	CQC	CQC	CQC	CQC	CQC
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
35	35	35	35	36	36	36

YE13L–508M	YE13R–500M	YE13R–508M	YE140–500	YE140–508	YE14L–500M	YE14L–508M
						
5.08mm	5.00mm	5.08mm	5.00mm	5.08mm	5.00mm	5.08mm
2～3poles	2～3poles	2～3poles	2～24poles	2～24poles	2～3poles	2～3poles
CQC	CQC	CQC	CQC	CQC	CQC	CQC
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
36	37	37	37	37	38	38



YE14R–500M	YE14R–508M	YE150–500	YE150–508	YE160–500	YE160–508	YE210–500M
						
5.00mm	5.08mm	5.00mm	5.08mm	5.00mm	5.08mm	5.00mm
2～3poles	2～3poles	2～24poles	2～24poles	2～24poles	2～24poles	2～3poles
CQC	CQC	CQC	CQC	CQC	CQC	CQC
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
38	38	39	39	39	39	40

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YongXing Terminial Blocks

YE210–508M	YE220–500M	YE220–508M	YE230–500	YE230–508	YE23L–500M	YE23L–508M
						
5.08mm	5.00mm	5.08mm	5.00mm	5.08mm	5.00mm	5.08mm
2 ~ 3poles	2 ~ 3poles	2 ~ 3poles	2 ~ 24poles	2 ~ 24poles	2 ~ 3poles	2 ~ 3poles
CAC	CAC	CAC	CAC	CAC	CAC	CAC
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
40	40	40	41	41	41	41

YE23R–500M	YE23R–508M	YE240–500	YE240–508	YE24L–500M	YE24L–508M	YE24R–500M
						
5.00mm	5.08mm	5.00mm	5.08mm	5.00mm	5.08mm	5.00mm
2 ~ 3poles	2 ~ 3poles	2 ~ 24poles	2 ~ 24poles	2 ~ 3poles	2 ~ 3poles	2 ~ 3poles
CAC	CAC	CAC	CAC	CAC	CAC	CAC
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
42	42	42	42	43	43	43

YE24R–508M	YE250–500	YE250–508	YE260–500	YE260–508	YE330–508	YE350–508
						
5.08mm	5.00mm	5.08mm	5.00mm	5.08mm	5.08mm	5.08mm
2 ~ 3poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles
CAC	CAC	CAC	CAC	CAC	CAC	CAC
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
43	44	44	44	44	45	45

YE370–508	YE510–500	YE510–508	YE530–500	YE530–508	YE630–508	YE650–508
						
5.08mm	5.00mm	5.08mm	5.00mm	5.08mm	5.08mm	5.08mm
2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles	2 ~ 24poles
CAC	CAC	CAC	CAC	CAC	CAC	CAC
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
46	46	46	47	47	47	48

YE350KJ-508	YE860-508	CT-508	KT-508			
						
5.08mm	5.08mm					
2~24poles	2~24poles					
cec	cec					
	16Amp AC300V					
48	49	49	49			

YX

NO.	YX122-508	YX122-762	YX122-016	YX222-508	YX222-762	YX222-016
Photo						
Pitch.	5.08mm	7.62mm	10.16mm	5.08mm	7.62mm	10.16mm
Poles.	2~16poles	2~16poles	2~16poles	2~16poles	2~16poles	2~16poles
Approval.	cec	cec	cec	cec	cec	cec
Rating.	10Amp AC300V	10Amp AC300V	10Amp AC300V	10Amp AC300V	10Amp AC300V	10Amp AC300V
Page.	50	50	51	51	52	52

STEEL

Care clamp:Steel Ni plated

压 线 框：铁 镀镍


NO.	YB310-500M	YB310-508M	YB310-762M	YB320-500M	YB320-508M	YB360-500M
Photo						
Pitch.	5.00mm	5.08mm	7.62mm	5.00mm	5.08mm	5.00mm
Poles.	2~3poles	2~3poles	2~3poles	2~3poles	2~3poles	2~3poles
Approval.	cec	cec	cec	cec	cec	cec
Rating.	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
Page.	12	12	12	12	12	15

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081

YongXing Terminial Blocks

YB360–508M	YB370–500M	YB370–508M	YB420A–508M	YB420B–508M	YB430–508M	YB520–500M
						
5.08mm	5.00mm	5.08mm	5.08mm	5.08mm	5.08mm	5.00mm
2～3poles	2～3poles	2～3poles	2～3poles	2～3poles	2～3poles	2～6poles
CQC	CQC	CQC	CQC	CQC	CQC	CQC
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
15	15	15	16	16	17	17

YB520–508M	YB610–508M	YB620–508M	YB910–635M	YB910–762M	YB910–952M	YC100S–500
						
5.08mm	5.08mm	5.08mm	6.35mm	7.62mm	9.52mm	5.00mm
2～6poles	2～3poles	2～3poles	2～3poles	2～3poles	2～3poles	2～24poles
CQC	CQC	CQC	CQC	CQC	CQC	CQC
16Amp AC300V	16Amp AC300V	16Amp AC300V	30Amp AC300V	30Amp AC300V	30Amp AC300V	16Amp AC300V
17	18	18	19	19	20	24

YC100S–508	YC101S–500	YC101S–508	YC010S–500	YC010S–508	YC011S–500	YC011S–508
						
5.08mm	5.00mm	5.08mm	5.00mm	5.08mm	5.00mm	5.08mm
2～24poles	2～24poles	2～24poles	2～24poles	2～24poles	2～24poles	2～24poles
CQC	CQC	CQC	CQC	CQC	CQC	CQC
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V
24	24	24	25	25	25	25

YC020S–500	YC020S–508	YC021S–500	YC021S–508			
						
5.00mm	5.08mm	5.00mm	5.08mm			
2～24poles	2～24poles	2～24poles	2～24poles			
CQC	CQC	CQC	CQC			
16Amp AC300V	16Amp AC300V	16Amp AC300V	16Amp AC300V			
26	26	26	26			

订 购 方 式
HOW TO ORDER

螺钉式PCB接线端子（弹片压线）

Y A — 永星接线端子 / 压线方式

XX 序列号 No.	X 插脚形状 Contact Shape	XXX 间距 Pitch	XX 极数 No. of pole	X 颜色 Color	X X X 客户需求 Customer Request
01 02 03 ··	方脚/黄铜镀锡/90° ···1 圆脚/黄铜镀锡/90° ···2 方脚/黄铜镀锡/180° ···3 圆脚/黄铜镀锡/180° ···4	3.50mm ··· 350 3.81mm ··· 381 5.00mm ··· 500 7.50mm ··· 750 10.00mm ··· 100	模组式/2P ··· M2 模组式/3P ··· M2 一体式/2P ··· 02 一体式/3P ··· 03 ·· ··· ·· ·· ··· ·· 一体式/27P ··· 27	1 灰色 Grey 2 蓝色 Blue 3 黑色 Black 4 绿色 Green 5 橙色 Orange 6 红色 Red 7 黄色 Yellow 8 白色 White	



YA331 – 500M – 05 P – 4

螺钉式PCB接线端子（压线框压线）

Y B — 永星接线端子 / 压线方式

XX 序列号 No.	X 压线框 Care clamp	XXX P 间距 Pitch	XX 极数 No. of pole	X 颜色 Color	X X X 客户需求 Customer Request
01 02 03 ··	钢 镀 锌 ··· 0 黄铜镀镍 ··· 2	3.50mm ··· 350 3.81mm ··· 381 5.00mm ··· 500 5.08mm ··· 508 6.35mm ··· 635 7.50mm ··· 750 7.62mm ··· 762 9.52mm ··· 952 10.00mm ··· 100 10.16mm ··· 016	模组式/2P ··· M2 模组式/3P ··· M2 一体式/2P ··· 02 一体式/3P ··· 03 ·· ··· ·· ·· ··· ·· 一体式/24P ··· 24	1 灰色 Grey 2 蓝色 Blue 3 黑色 Black 4 绿色 Green 5 橙色 Orange 6 红色 Red 7 黄色 Yellow 8 白色 White	



YB322 – 508 – 12 P – 4

插拔式接线端子（插头）

Y C — 永星接线端子 / 压线方式

XX 序列号 No.	X 法兰 Flange	S 压线框材质 Cage Clamp material	XXX 间距 Pitch	XX 极数 No. of pole	X 颜色 Color	X X X 客户需求 Customer Request
01 02 03 ··	无发兰 ···0 有发兰 ···1	铁 ··· S 铜 ···(无)	3.50mm ··· 350 3.81mm ··· 381 5.00mm ··· 500 5.08mm ··· 508 6.35mm ··· 635 7.50mm ··· 750 7.62mm ··· 762 9.52mm ··· 952 10.00mm ··· 100 10.16mm ··· 016	一体式/2P ··· 02 一体式/3P ··· 03 ·· ··· ·· ·· ··· ·· ·· ··· ·· ·· ··· ·· 一体式/24P ··· 24	1 灰色 Grey 2 蓝色 Blue 3 黑色 Black 4 绿色 Green 5 橙色 Orange 6 红色 Red 7 黄色 Yellow 8 白色 White	



YC101 – 508 – 11 P – 4

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081

订 购 方 式
HOW TO ORDER

插拔式接线端子（插座）

Y E — 永星接线端子

X 序列号 No.	X 插脚形状 Contact Shape	X 外型 Exterior	XXX 间距 Pitch	XX 极数 No. of pole	X 颜色 Color	X X X 客户需求 Customer Request
1 2 3 ·· 压线方式	开放/弯针 ·· 1 开放/直针 ·· 2 封闭/弯针 ·· 3 封闭/直针 ·· 4 法兰/弯针 ·· 5 法兰/直针 ·· 6	一体 ·· 0 左边 ·· L 右边 ·· R	3.50mm ··· 350 3.81mm ··· 381 5.00mm ··· 500 5.08mm ··· 508 6.35mm ··· 635 7.50mm ··· 750 7.62mm ··· 762 9.52mm ··· 952 10.00mm ··· 100 10.16mm ··· 016	模组式/2P ··· M2 模组式/3P ··· M2 一体式/2P ··· 02 一体式/3P ··· 03 ·· ··· ·· ·· ··· ·· 一体式/24P ··· 24	1 灰色 Grey 2 蓝色 Blue 3 黑色 Black 4 绿色 Green 5 橙色 Orange 6 红色 Red 7 黄色 Yellow 8 白色 White	



YE010 – 508 – 08 P – 4

弹簧式PCB接线端子

Y X — 永星接线端子


XX 序列号 No.	X 插脚形状 Contact Shape	XXX 间距 Pitch	XX 极数 No. of pole	X 颜色 Color	X X X 客户需求 Customer Request
01 02 03 ·· 压线方式	方脚/黄铜镀锡 ··· 2	3.50mm ··· 350 5.00mm ··· 500 5.08mm ··· 508 7.62mm ··· 762 10.16mm ··· 016	一体式/2P ··· 02 一体式/3P ··· 03 ·· ··· ·· ·· ··· ·· ·· ··· ·· ·· ··· ·· 一体式/24P ··· 24	1 灰色 Grey 2 蓝色 Blue 3 黑色 Black 4 绿色 Green 5 橙色 Orange 6 红色 Red 7 黄色 Yellow 8 白色 White	



YX222 – 508 – 06 P – 4



YA321-500

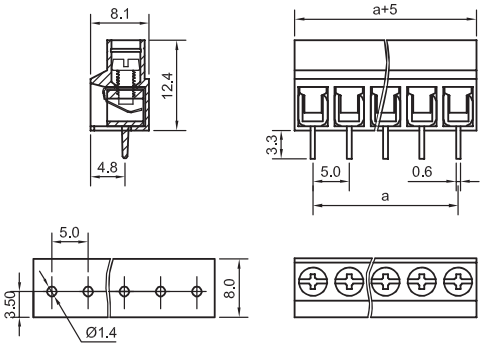

P.C.B LAYOUT

Pitch:5.00mm
Poles: 2~27 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

压线框：	黄铜镀锡	Care clamp	: Brass,Tin Plated
弹 片：	磷青铜镀镍	Wire protector	: Phosphor bronze Ni plated
塑 件：	PA66，UL94V-0	Housing	: PA66，UL94V-0
螺 丝：	M2.5，钢镀锌	Screws	: M2.5steel Zinc plated
颜 色：	绿色	Color	: Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature：+250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：26-14AWG 1.5mm²	Wire range : 26-14AWG 1.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YA321-100

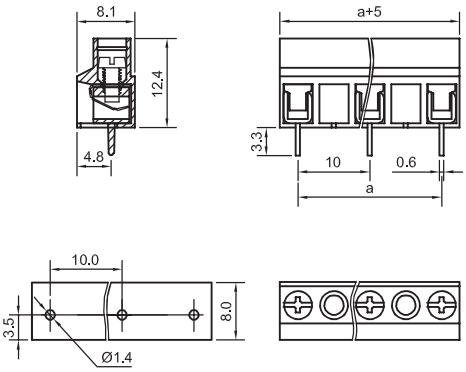

P.C.B LAYOUT

Pitch:10.0mm
Poles: 2~27 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

压线框：黄铜镀锡		Cage clamp	: Brass,Tin Plated
弹 片：磷青铜镀镍		Wire protector	: Phosphor bronze Ni plated
塑 件：PA66，UL94V-0		Housing	: PA66，UL94V-0
螺 丝：M2.5，钢镀锌		Screws	: M2.5steel Zinc plated
颜 色：绿色		Color	: Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature：+250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：26-14AWG 1.5mm²	Wire range : 26-14AWG 1.5mm²
剥线长度：6-7mm	Strip length : 6-7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YA331-500M

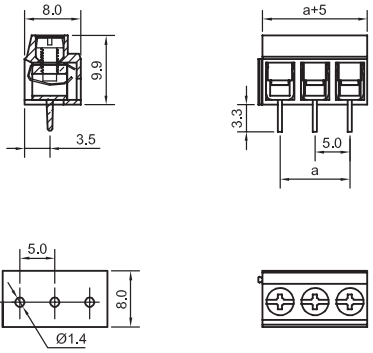

P.C.B LAYOUT

Pitch:5.00mm
Poles: 2~3 poles
Approval: CQC


◆ 材质及电镀	◆ Material
压线框：黄铜镀锡	Care clamp : Brass,Tin Plated
弹 片：磷青铜镀镍	Wire protector : Phosphor bronze Ni plated
塑 件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺 丝：M2.5，钢镀锌	Screws : M2.5steel Zinc plated
颜 色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：26-14AWG 1.5mm²	Wire range : 26-14AWG 1.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YA331-100M

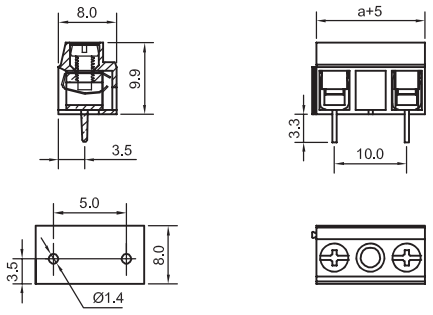

P.C.B LAYOUT

Pitch:10.0mm
Poles: 2~3 poles
Approval: CQC


◆ 材质及电镀	◆ Material
压线框：黄铜镀锡	Care clamp : Brass,Tin Plated
弹 片：磷青铜镀镍	Wire protector : Phosphor bronze Ni plated
塑 件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺 丝：M2.5，钢镀锌	Screws : M2.5steel Zinc plated
颜 色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：26-14AWG 1.5mm²	Wire range : 26-14AWG 1.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YB312-500M
YB312-508M/YB312-762M

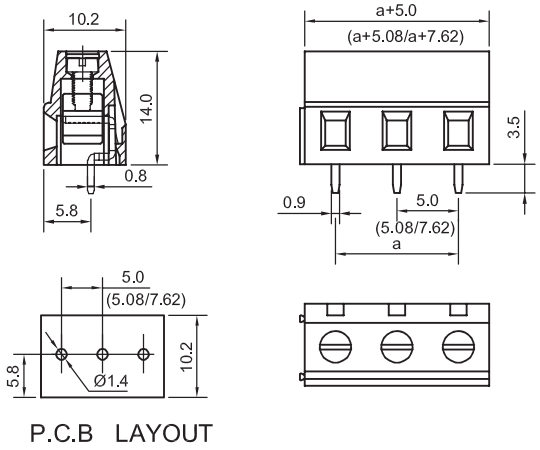

P.C.B LAYOUT

Pitch:5.00mm;5.08mm;7.62mm
Poles: 2~3 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插 脚：黄铜镀锡	Contact : Brass,Tin Plated
塑 件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺 丝：M2.5，钢镀锌	Screws : M2.5steel Zinc plated
颜 色：绿色	Color : Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature：+250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-12AWG 2.5mm²	Wire range : 24-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YB322-500M/YB322-508M

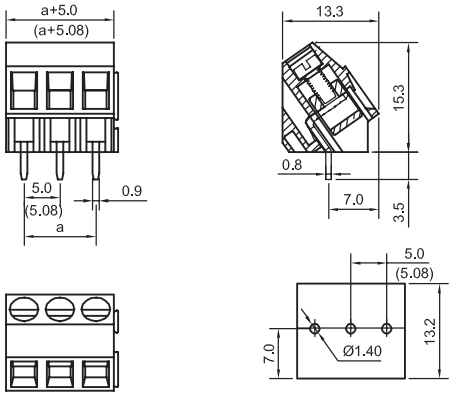

P.C.B LAYOUT

Pitch:5.00mm;5.08mm
Poles: 2~3 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass,Ni Plated
插 脚：黄铜镀锡	Contact : Brass,Tin Plated
塑 件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺 丝：M2.5，钢镀锌	Screws : M2.5steel Zinc plated
颜 色：绿色	Color : Green


◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature：+250° for 5 sec

◆ 电气规格 ◆ Electrical


额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-12AWG 2.5mm²	Wire range : 24-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YB332V-350M

Pitch:3.50mm
Poles: 2~3 poles
Approval: CQC

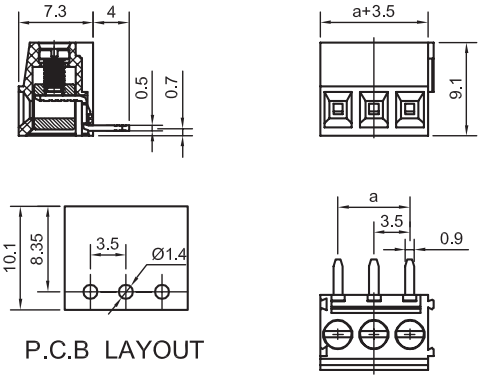

P.C.B LAYOUT

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺　丝：M2.0，钢镀锌	Screws : M2.0steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250°　5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000M Ω DC500V	Insulationt resistance : >5000M Ω DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-14AWG 1.5mm^2	Wire range : 28-14AWG 1.5mm^2
剥线长度：6-7mm	Strip length : 6-7mm



YB332A-381M

Pitch:3.81mm
Poles: 2~3 poles
Approval: CQC

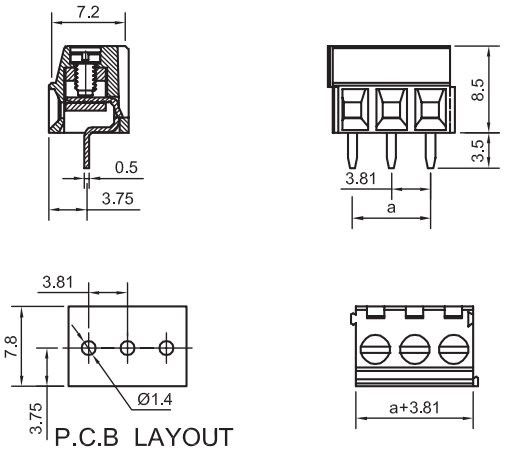

P.C.B LAYOUT

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺　丝：M2.0，钢镀锌	Screws : M2.0steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250°　5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000M Ω DC500V	Insulationt resistance : >5000M Ω DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-14AWG 1.5mm^2	Wire range : 28-14AWG 1.5mm^2
剥线长度：6-7mm	Strip length : 6-7mm



YB332B-381M

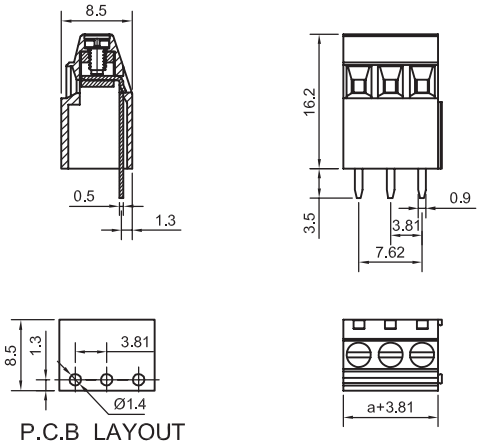

Pitch:3.81mm
Poles: 2~3 poles
Approval: CQC


◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺　丝：M2.0，钢镀锌	Screws : M2.0steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature：+250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-14AWG 1.5mm²	Wire range : 28-14AWG 1.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YB362-381M

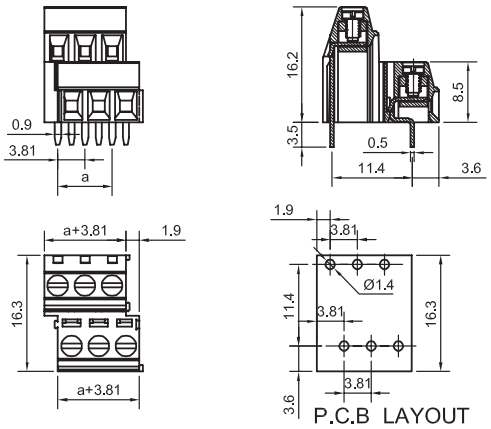

Pitch:3.81mm
Poles: 2~3 poles
Approval: CQC

◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺　丝：M2.0，钢镀锌	Screws : M2.0steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature：+250° for 5 sec


◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-14AWG 1.5mm²	Wire range : 28-14AWG 1.5mm²
剥线长度：6-7mm	Strip length : 6-7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081

YongXing Terminial Blocks



YB362-500M/YB362-508M

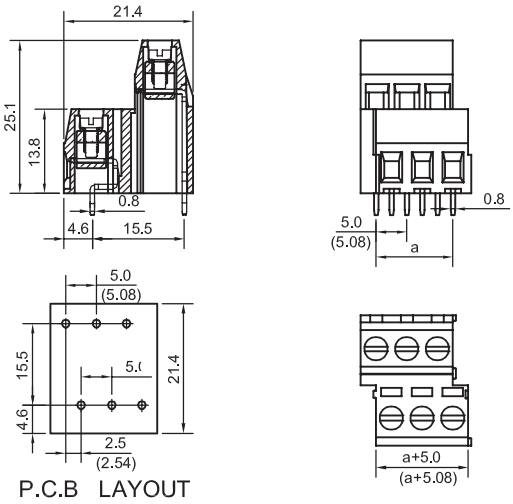

P.C.B LAYOUT

Pitch:5.00mm;5.08mm
Poles: 2~3 poles
Approval:

◆ 材质及电镀

压线框：黄铜镀镍
插　脚：黄铜镀锡
塑　件：PA66，UL94V-0
螺　丝：M2.5，钢镀锌
颜　色：绿色

◆ Material

Care clamp : Brass, Ni Plated
Contact : Brass,Tin Plated
Housing : PA66，UL94V-0
Screws : M2.5steel Zinc plated
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250°　5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature : +250° for 5 sec

◆ 电气规格


额定电压：300V
额定电流：16A
接触电阻：20m Ω
绝缘电阻：>5000M Ω DC500V
耐 电 压：AC2000V/1Min
使用线经：24-12AWG 2.5mm²
剥线长度：6-7mm

◆ Electrical

Rated voltage : 300V
Rated current : 16A
Contact resistance : 20m Ω
Insulationt resistance : >5000M Ω DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 24-12AWG 2.5mm²
Strip lenqath : 6-7mm



YB422A-508M

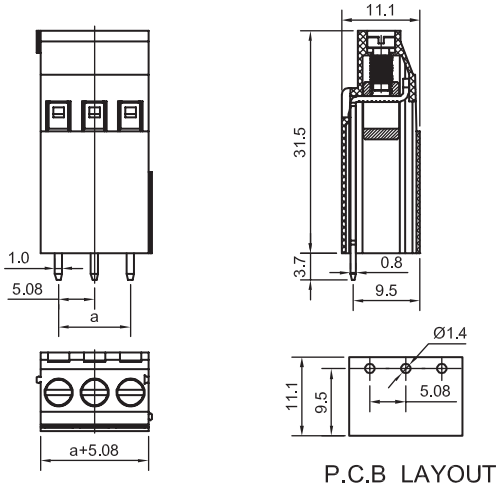

P.C.B LAYOUT

Pitch:5.08mm
Poles: 2~3 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺　丝：M2.5，钢镀锌	Screws : M2.5steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-12AWG 2.5mm²	Wire range : 24-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YB422B-508M

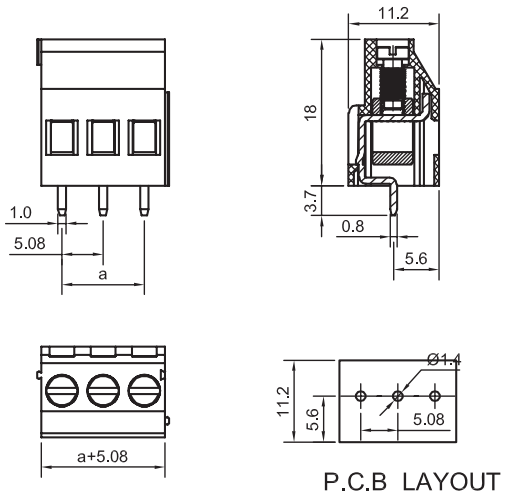

P.C.B LAYOUT

Pitch:5.08mm
Poles: 2~3 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺　丝：M2.5，钢镀锌	Screws : M2.5steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical


额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-12AWG 2.5mm²	Wire range : 24-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081

YongXing Terminial Blocks



YB432-508M

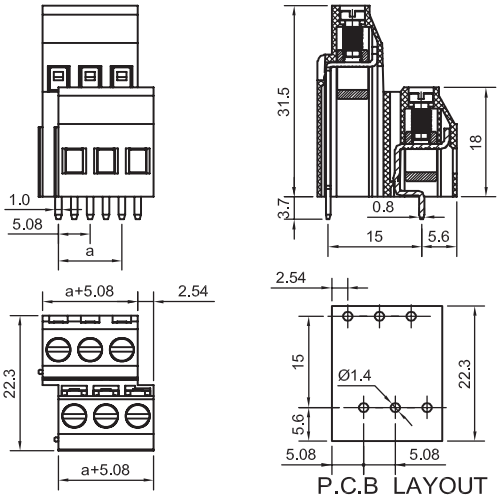

P.C.B LAYOUT

Pitch:5.08mm
Poles: 2~3 poles
Approval: CEC


◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺　丝：M2.5，钢镀锌	Screws : M2.5steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-12AWG 2.5mm²	Wire range : 24-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YB522-500/YB522-508

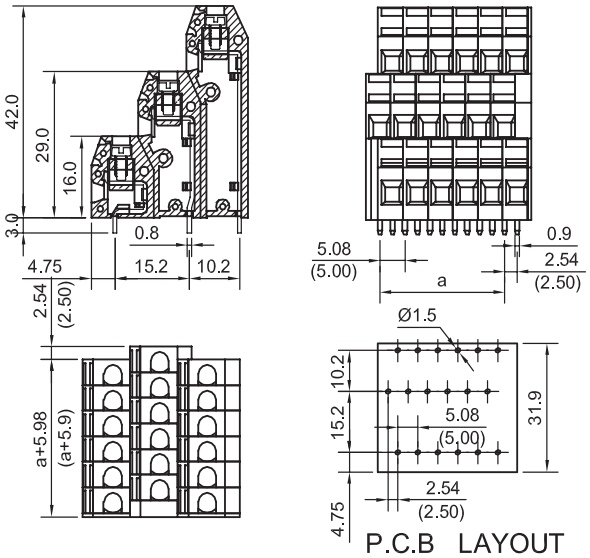

P.C.B LAYOUT

Pitch:5.00mm;5.08mm
Poles: 2~6poles
Approval: CEC


◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66，UL94V-0
螺　丝：M2.5，钢镀锌	Screws : M2.5steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-12AWG 2.5mm²	Wire range : 24-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YB612-508M

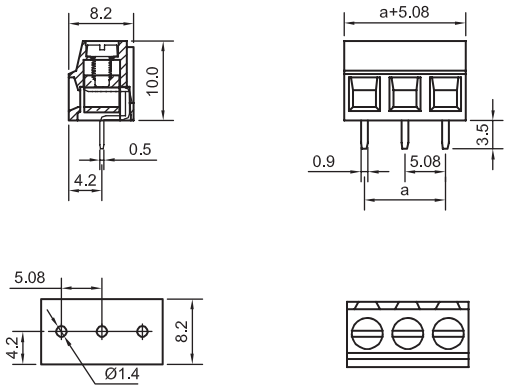

P.C.B LAYOUT

Pitch:5.08mm
Poles: 2~3 poles
Approval: CQC


◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插 脚：黄铜镀锡	Contact : Brass, Tin Plated
塑 件：PA66，UL94V-0	Housing : PA66, UL94V-0
螺 丝：M2.5，钢镀锌	Screws : M2.5 steel Zinc plated
颜 色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-12AWG 2.5mm²	Wire range : 24-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YB622-508M

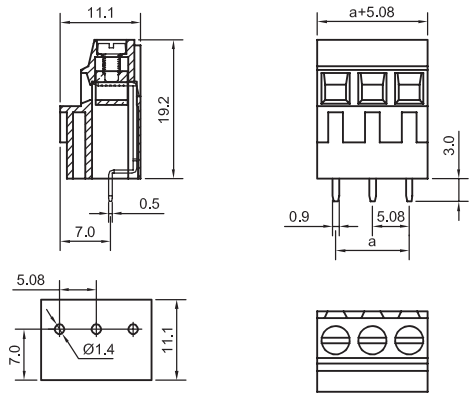

P.C.B LAYOUT

Pitch:5.08mm
Poles: 2~3poles
Approval: CQC

◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插 脚：黄铜镀锡	Contact : Brass, Tin Plated
塑 件：PA66，UL94V-0	Housing : PA66, UL94V-0
螺 丝：M2.5，钢镀锌	Screws : M2.5 steel Zinc plated
颜 色：绿色	Color : Green


◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-12AWG 2.5mm²	Wire range : 24-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YB912-635M

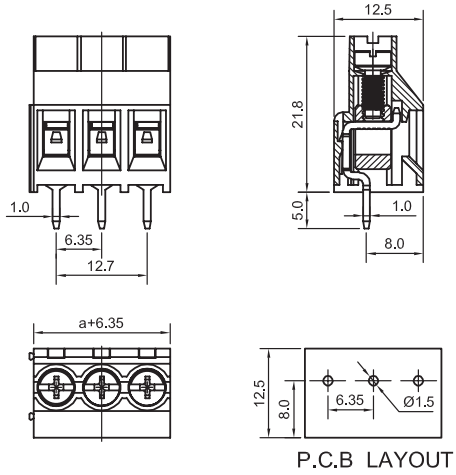

P.C.B LAYOUT

Pitch:6.35mm
Poles: 2~3 poles
Approval: CQC


◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass, Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66, UL94V-0
螺　丝：M3，钢镀锌	Screws : M3 steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：30A	Rated current : 30A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-10AWG 3.0mm²	Wire range : 24-10AWG 3.0mm²
剥线长度：6-7mm	Strip length : 6-7mm



YB912-762M

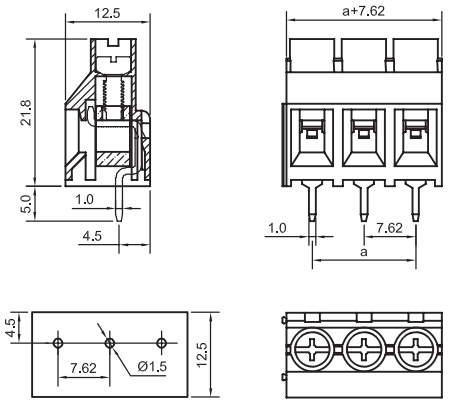

P.C.B LAYOUT

Pitch:7.62mm
Poles: 2~3 poles
Approval: CQC


◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass, Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66, UL94V-0
螺　丝：M3，钢镀锌	Screws : M3 steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：30A	Rated current : 30A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-10AWG 3.0mm²	Wire range : 24-10AWG 3.0mm²
剥线长度：6-7mm	Strip length : 6-7mm



YB912-952M

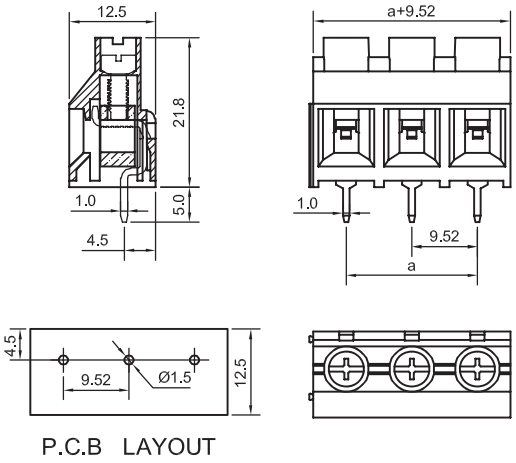

P.C.B LAYOUT

Pitch:9.52mm
Poles: 2~3 poles
Approval: CQC

◆ 材质及电镀

压线框：黄铜镀镍
插　脚：黄铜镀锡
塑　件：PA66，UL94V–0
螺　丝：M3，钢镀锌
颜　色：绿色

◆ Material

Care clamp : Brass, Ni Plated
Contact : Brass,Tin Plated
Housing : PA66,UL94V–0
Screws : M3 steel Zinc plated
Color : Green

◆ 工作环境

操作温度：–40° ~+150°
瞬间温度：+250°　5秒

◆ Environmental

Operation temperature : –40° ~+150°
Short–time temperature : +250° for 5 sec

◆ 电气规格

额定电压：300V
额定电流：30A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min
使用线经：24–10AWG 3.0mm²
剥线长度：6–7mm

◆ Electrical


Rated voltage : 300V
Rated current : 30A
Contact resistance : 20m Ω
Insulationt resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 24–10AWG 3.0mm²
Strip length : 6–7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081

Pitch:3.5mm;3.81mm
Poles: 2~24 poles
Approval: CQC



YC420-350 / YC420-381

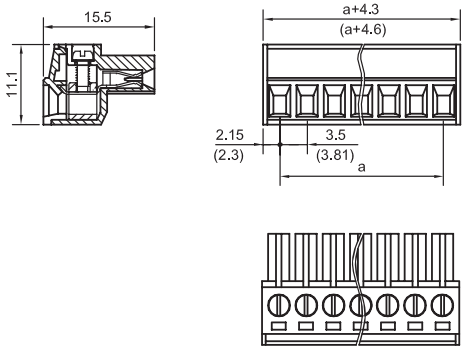

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66, UL94V-0
螺　丝：M2.0，钢镀锌	Screws : M2.0steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-14AWG 1.5mm^2	Wire range : 28-14AWG 1.5mm^2
剥线长度：6-7mm	Strip length : 6-7mm

Pitch:3.5mm;3.81mm
Poles: 2~24poles
Approval: CQC



YC421-350 / YC421-381

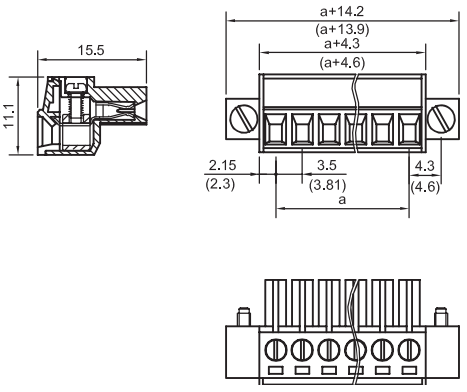

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66, UL94V-0
螺　丝：M2.0，钢镀锌	Screws : M2.0steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-14AWG 1.5mm^2	Wire range : 28-14AWG 1.5mm^2
剥线长度：6-7mm	Strip length : 6-7mm



YC060-350/YC060-381

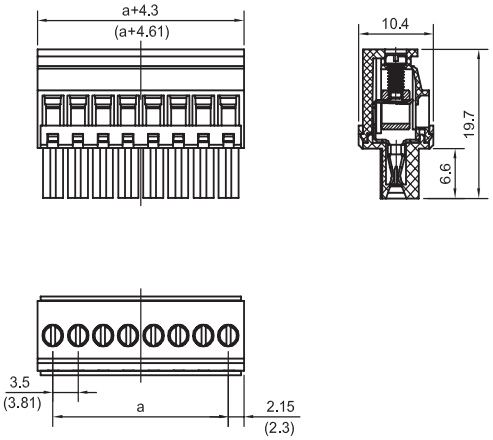

Pitch:3.5mm;3.81mm
Poles: 2~24 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66,UL94V-0
螺　丝：M2.0，钢镀锌	Screws : M2.0steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250°　5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-14AWG 1.5mm²	Wire range : 28-14AWG 1.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YC061-350/YC061-381

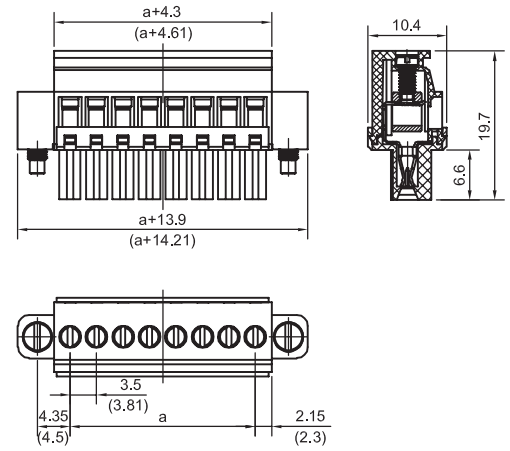

Pitch:3.5mm;3.81mm
Poles: 2~24poles
Approval: CQC

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66,UL94V-0
螺　丝：M2.0，钢镀锌	Screws : M2.0steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250°　5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical


额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-14AWG 1.5mm²	Wire range : 28-14AWG 1.5mm²
剥线长度：6-7mm	Strip length : 6-7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YC070-350/YC070-381

Pitch:3.5mm;3.81mm
Poles: 2~24 poles
Approval: CQC

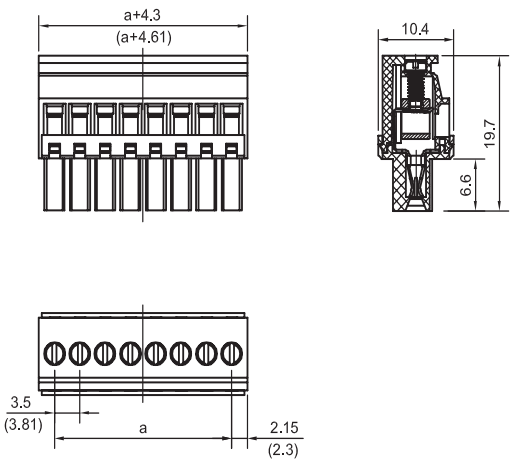

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66, UL94V-0
螺　丝：M2.0，钢镀锌	Screws : M2.0steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-14AWG 1.5mm^2	Wire range : 28-14AWG 1.5mm^2
剥线长度：6-7mm	Strip length : 6-7mm



YC071-350/YC071-381

Pitch:3.5mm;3.81mm
Poles: 2~24poles
Approval: CQC

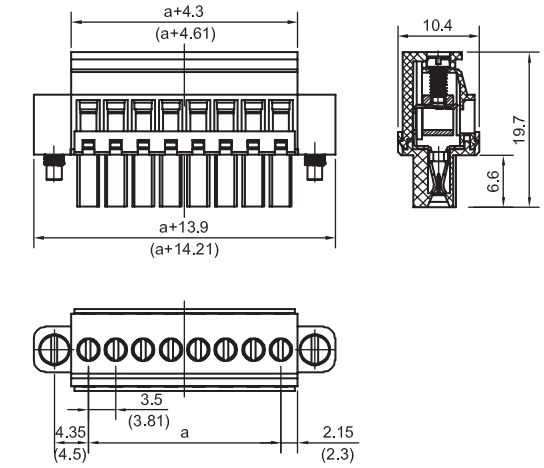

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66, UL94V-0
螺　丝：M2.0，钢镀锌	Screws : M2.0steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-14AWG 1.5mm^2	Wire range : 28-14AWG 1.5mm^2
剥线长度：6-7mm	Strip length : 6-7mm



YC100-500 / YC100-508

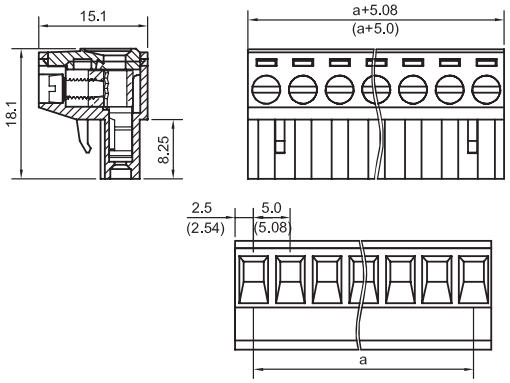

Pitch:5.00mm;5.08mm
Poles: 2~24poles
Approval: CQC


◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66,UL94V-0
螺　丝：M3，钢镀锌	Screws : M3steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-12AWG 2.5mm^2	Wire range : 28-12AWG 2.5mm^2
剥线长度：6-7mm	Strip length : 6-7mm



YC101-500 / YC101-508

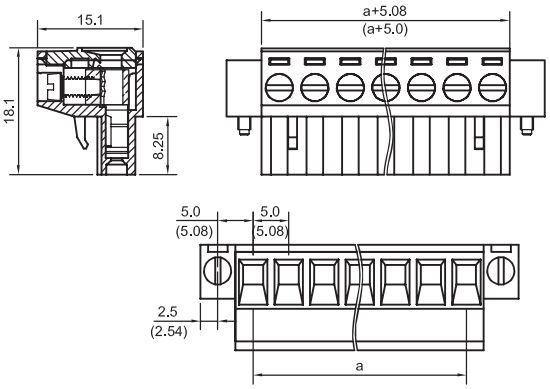

Pitch:5.00mm;5.08mm
Poles: 2~24poles
Approval: CQC

◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66,UL94V-0
螺　丝：M3，钢镀锌	Screws : M3steel Zinc plated
颜　色：绿色	Color : Green


◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-12AWG 2.5mm^2	Wire range : 28-12AWG 2.5mm^2
剥线长度：6-7mm	Strip length : 6-7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YC010-500 / YC010-508

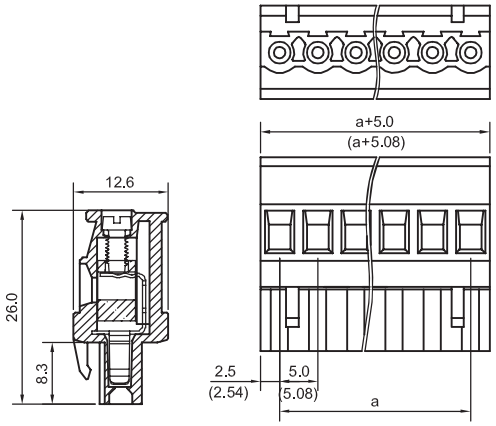

Pitch:5.00mm;5.08mm
Poles: 2~24poles
Approval: CQC

◆ 材质及电镀

压线框：黄铜镀镍
簧　片：磷铜镀锡
塑　件：PA66，UL94V-0
螺　丝：M3，钢镀锌
颜　色：绿色

◆ Material

Care clamp : Brass, Ni Plated
Wire guard : Phosphor Tin Plated
Housing : PA66,UL94V-0
Screws : M3steel Zinc plated
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250° 5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature: +250° for 5 sec

◆ 电气规格


额定电压：300V
额定电流：16A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min
使用线经：28-12AWG 2.5mm²
剥线长度：6-7mm

◆ Electrical

Rated voltage : 300V
Rated current : 16A
Contact resistance : 20mΩ
Insulationt resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 28-12AWG 2.5mm²
Strip length : 6-7mm



YC011-500 / YC011-508

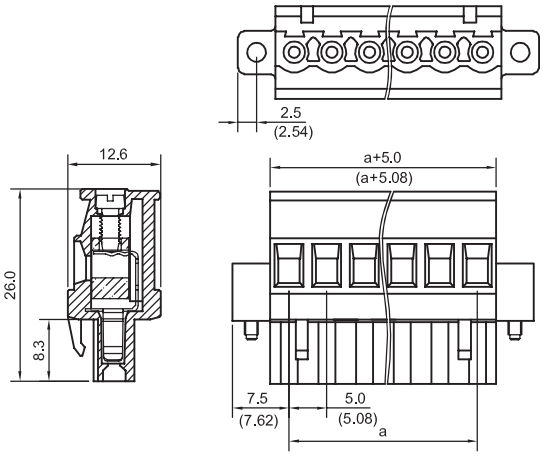

Pitch:5.00mm;5.08mm
Poles: 2~24poles
Approval: CQC

◆ 材质及电镀

压线框：黄铜镀镍
簧　片：磷铜镀锡
塑　件：PA66，UL94V-0
螺　丝：M3，钢镀锌
颜　色：绿色

◆ Material

Care clamp : Brass, Ni Plated
Wire guard : Phosphor Tin Plated
Housing : PA66,UL94V-0
Screws : M3steel Zinc plated
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250° 5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature: +250° for 5 sec

◆ 电气规格


额定电压：300V
额定电流：16A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min
使用线经：28-12AWG 2.5mm²
剥线长度：6-7mm


◆ Electrical

Rated voltage : 300V
Rated current : 16A
Contact resistance : 20mΩ
Insulationt resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 28-12AWG 2.5mm²
Strip length : 6-7mm



YC020-500 / YC020-508



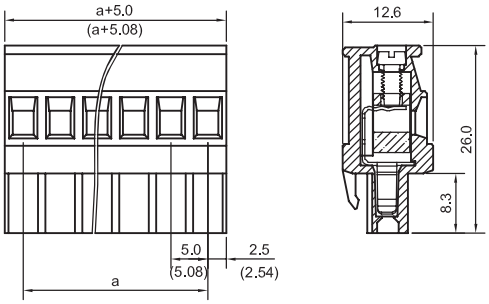

Pitch:5.00mm;5.08mm
Poles: 2~24poles
Approval: CQC


◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V–0	Housing : PA66,UL94V–0
螺　丝：M3，钢镀锌	Screws : M3steel Zinc plated
颜　色：绿色	Color : Green


◆ 工作环境	◆ Environmental
操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250° 5秒	Short–time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28–12AWG 2.5mm^2	Wire range : 28–12AWG 2.5mm^2
剥线长度：6–7mm	Strip length : 6–7mm



YC021-500 / YC021-508



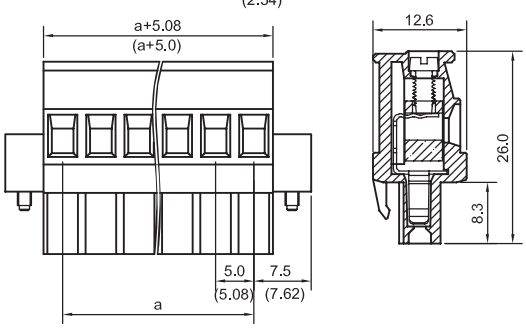

Pitch:5.00mm;5.08mm
Poles: 2~24poles
Approval: CQC

◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V–0	Housing : PA66,UL94V–0
螺　丝：M3，钢镀锌	Screws : M3steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250° 5秒	Short–time temperature : +250° for 5 sec


◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28–12AWG 2.5mm^2	Wire range : 28–12AWG 2.5mm^2
剥线长度：6–7mm	Strip length : 6–7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YC030-508

Pitch:5.08mm
Poles: 2~24 poles
Approval: CQC

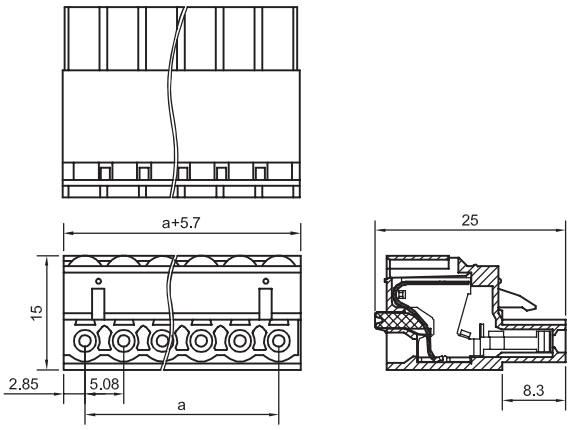

◆ 材质及电镀

弹　片：不锈钢
簧　片：磷铜镀锡
塑　件：PA66，UL94V-0
颜　色：绿色

◆ Material

Wire protector : Stainless strip steel
Wire guard : Phosphor Tin Plated
Housing : PA66,UL94V-0
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250° 5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature : +250° for 5 sec

◆ 电气规格

额定电压：300V
额定电流：16A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min
使用线经：28-12AWG 2.5mm²
剥线长度：6-7mm


◆ Electrical

Rated voltage : 300V
Rated current : 16A
Contact resistance : 20m Ω
Insulationt resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 28-12AWG 2.5mm²
Strip length : 6-7mm



YC031-508

Pitch:5.08mm
Poles: 2~24 poles
Approval: CQC

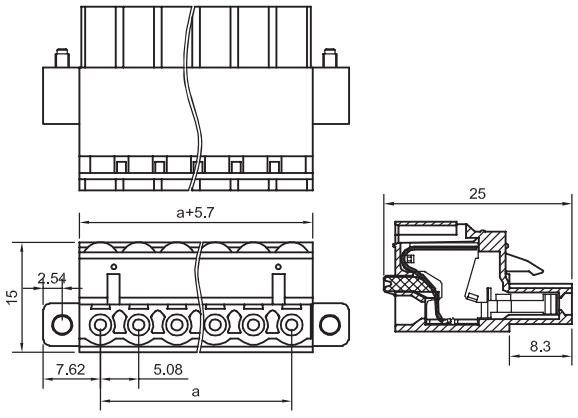

◆ 材质及电镀

弹　片：不锈钢
簧　片：磷铜镀锡
塑　件：PA66，UL94V-0
颜　色：绿色

◆ Material

Wire protector : Stainless strip steel
Wire guard : Phosphor Tin Plated
Housing : PA66,UL94V-0
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250° 5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature : +250° for 5 sec

◆ 电气规格

额定电压：300V
额定电流：16A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min
使用线经：28-12AWG 2.5mm²
剥线长度：6-7mm


◆ Electrical


Rated voltage : 300V
Rated current : 16A
Contact resistance : 20m Ω
Insulationt resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 28-12AWG 2.5mm²
Strip length : 6-7mm



YC040-508

Pitch:5.08mm
Poles: 2~24 poles
Approval: CEC



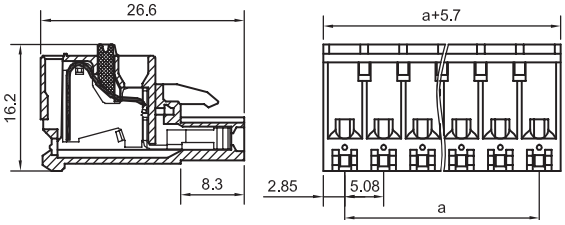

◆ 材质及电镀 ◆ Material

弹　片：不锈钢	Wire protector : Stainless strip steel
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66,UL94V-0
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical


额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-12AWG 2.5mm²	Wire range : 28-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YC041-508

Pitch:5.08mm
Poles: 2~24 poles
Approval: CEC



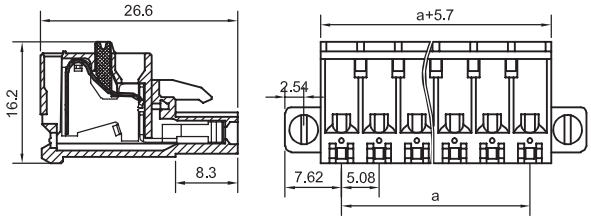

◆ 材质及电镀 ◆ Material

弹　片：不锈钢	Wire protector : Stainless strip steel
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66,UL94V-0
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-12AWG 2.5mm²	Wire range : 28-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YC050-508

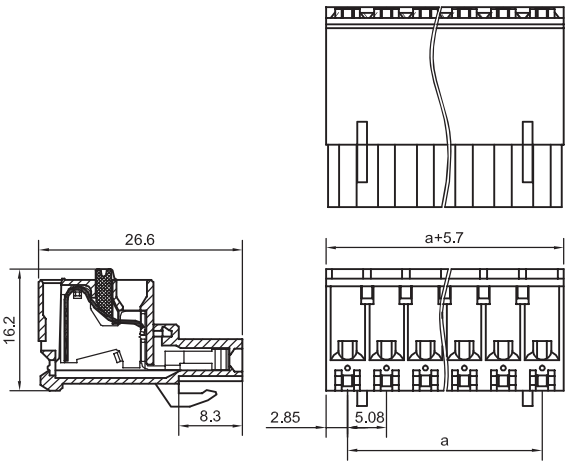

Pitch:5.08mm
Poles: 2~24 poles
Approval: CQC

◆ 材质及电镀 / ◆ Material

弹　片：不锈钢	Wire protector : Stainless strip steel
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66, UL94V-0	Housing : PA66,UL94V-0
颜　色：绿色	Color : Green

◆ 工作环境 / ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 / ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-12AWG 2.5mm²	Wire range : 28-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YC051-508

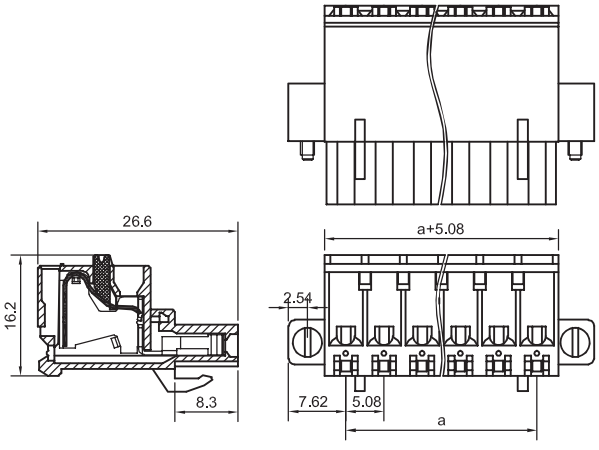

Pitch:5.08mm
Poles: 2~24 poles
Approval: CQC

◆ 材质及电镀 / ◆ Material

弹　片：不锈钢	Wire protector : Stainless strip steel
簧　片：磷铜镀锡	Wire guard : Phosphor Tin Plated
塑　件：PA66, UL94V-0	Housing : PA66,UL94V-0
颜　色：绿色	Color : Green

◆ 工作环境 / ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 / ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-12AWG 2.5mm²	Wire range : 28-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YE010-500 / YE010-508

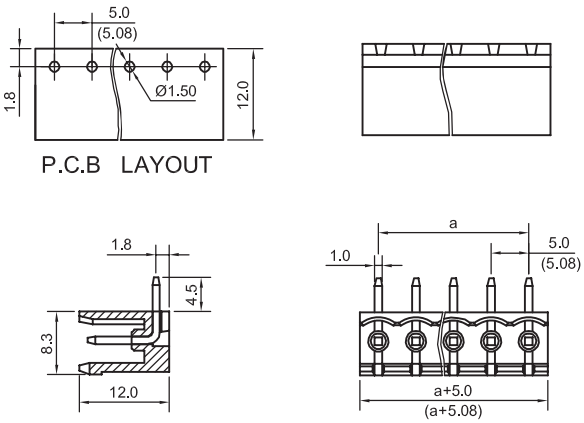

Pitch:5.00mm;5.08mm
Poles: 2~24 poles
Approval: CEC


◆ 材质及电镀	◆ Material
方　针：黄铜镀锡	Policy : Brass, Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66,UL94V-0
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulation t resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE020-500 / YE020-508

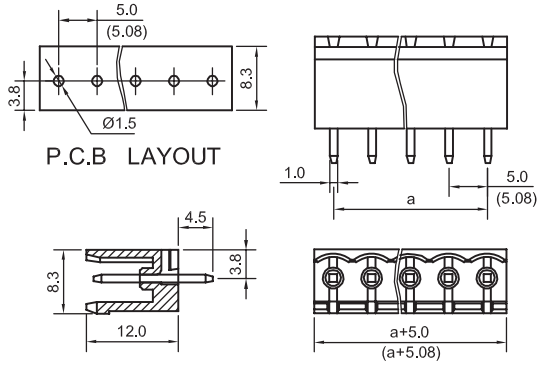

Pitch:5.00mm;5.08mm
Poles: 2~24 poles
Approval: CEC

◆ 材质及电镀	◆ Material
方　针：黄铜镀锡	Policy : Brass, Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66,UL94V-0
颜　色：绿色	Color : Green


◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulation t resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min


HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YE030-500 / YE030-508

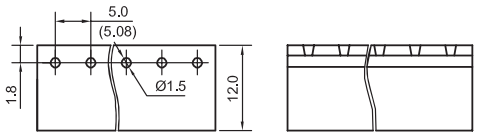

P.C.B LAYOUT

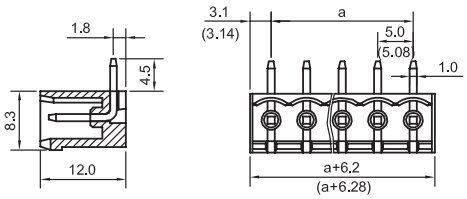


Pitch:5.00mm;5.08mm
Poles: 2~24 poles
Approval: CQC


◆ 材质及电镀	◆ Material
方　针：黄铜镀锡	Policy　：Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing　：PA66,UL94V-0
颜　色：绿色	Color　：Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature ：-40° ~+150°
瞬间温度：+250°　5秒	Short-time temperature：+250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage ：300V
额定电流：16A	Rated current ：16A
接触电阻：20mΩ	Contact resistance ：20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance ：>5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage：AC2000V/1Min



YE040-500 / YE040-508

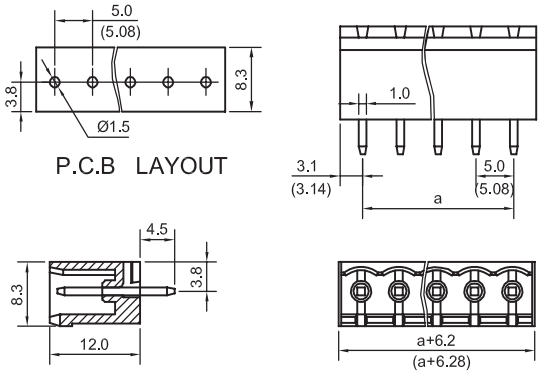

P.C.B LAYOUT

Pitch:5.00mm;5.08mm
Poles: 2~24 poles
Approval: CQC

◆ 材质及电镀	◆ Material
方　针：黄铜镀锡	Policy　：Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing　：PA66,UL94V-0
颜　色：绿色	Color　：Green


◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature ：-40° ~+150°
瞬间温度：+250°　5秒	Short-time temperature：+250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage ：300V
额定电流：16A	Rated current ：16A
接触电阻：20mΩ	Contact resistance ：20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance ：>5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage：AC2000V/1Min


Pitch:5.00mm;5.08mm
Poles: 2~24 poles
Approval: CQC



YE050-500 / YE050-508

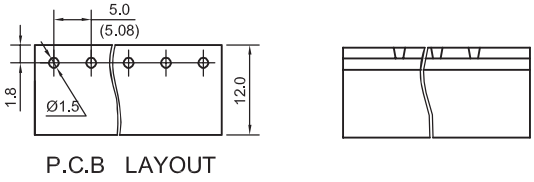

P.C.B LAYOUT

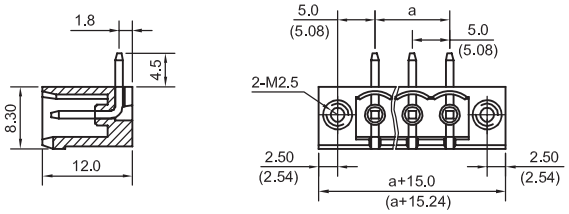

◆ 材质及电镀 ◆ Material

方　针	黄铜镀锡	Policy	Brass, Tin Plated
塑　件	PA66, UL94V-0	Housing	PA66,UL94V-0
颜　色	绿色	Color	Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulation resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min


Pitch:5.00mm;5.08mm
Poles: 2~24 poles
Approval: CQC



YE060-500 / YE060-508

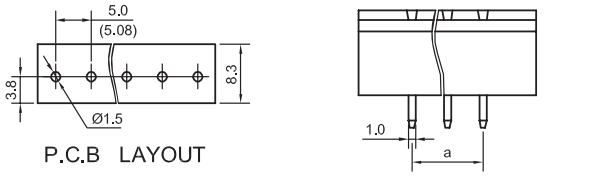

P.C.B LAYOUT

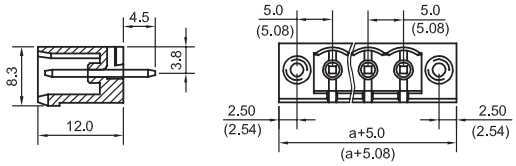

◆ 材质及电镀 ◆ Material

方　针	黄铜镀锡	Policy	Brass, Tin Plated
塑　件	PA66, UL94V-0	Housing	PA66,UL94V-0
颜　色	绿色	Color	Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulation resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YE430-350 / YE430-381

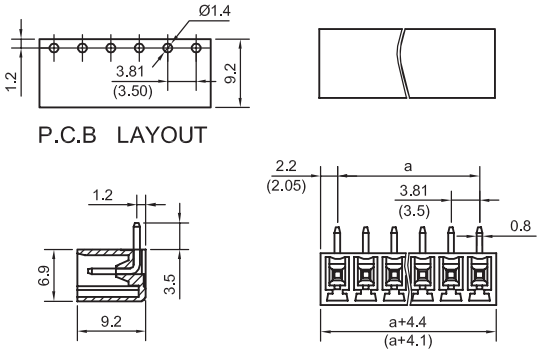

Pitch:3.5mm;3.81mm
Poles: 2~24 poles
Approval: CQC


◆ 材质及电镀	◆ Material
方　针：黄铜镀锡	Policy : Brass, Tin Plated
塑　件：PA66，UL94V–0	Housing : PA66,UL94V–0
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250° 5秒	Short–time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：12A	Rated current : 12A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000M Ω DC500V	Insulationt resistance : >5000M Ω DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE440-350 / YE440-381

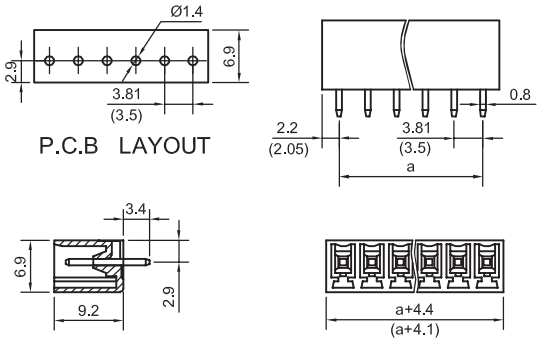

Pitch:3.5mm;3.81mm
Poles: 2~24 poles
Approval: CQC

◆ 材质及电镀	◆ Material
方　针：黄铜镀锡	Policy : Brass, Tin Plated
塑　件：PA66，UL94V–0	Housing : PA66,UL94V–0
颜　色：绿色	Color : Green


◆ 工作环境	◆ Environmental
操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250° 5秒	Short–time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：12A	Rated current : 12A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000M Ω DC500V	Insulationt resistance : >5000M Ω DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE450-350 / YE450-381

Pitch:3.5mm;3.81mm
Poles: 2~24 poles
Approval: CEC

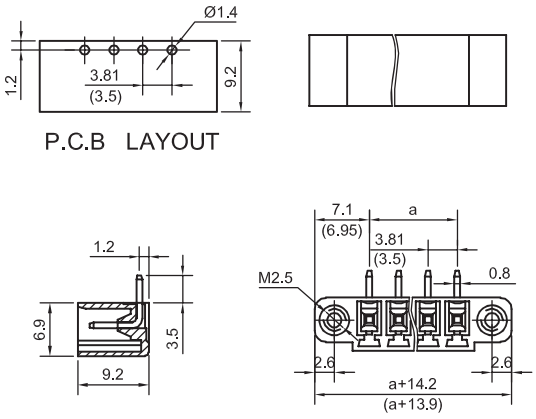

◆ 材质及电镀 ◆ Material


方　针	黄铜镀锡	Policy	Brass, Tin Plated
塑　件	PA66, UL94V–0	Housing	PA66,UL94V–0
颜　色	绿色	Color	Green

◆ 工作环境 ◆ Environmental

操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250° 5秒	Short–time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：12A	Rated current : 12A
接触电阻：20mΩ	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min

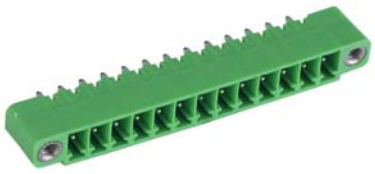

YE460-350 / YE460-381

Pitch:3.5mm;3.81mm
Poles: 2~24 poles
Approval: CEC

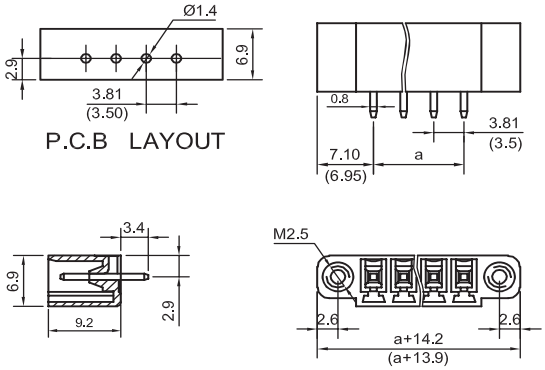

◆ 材质及电镀 ◆ Material

方　针	黄铜镀锡	Policy	Brass, Tin Plated
塑　件	PA66, UL94V–0	Housing	PA66,UL94V–0
颜　色	绿色	Color	Green

◆ 工作环境 ◆ Environmental

操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250° 5秒	Short–time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：12A	Rated current : 12A
接触电阻：20mΩ	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YE110-500M / YE110-508M

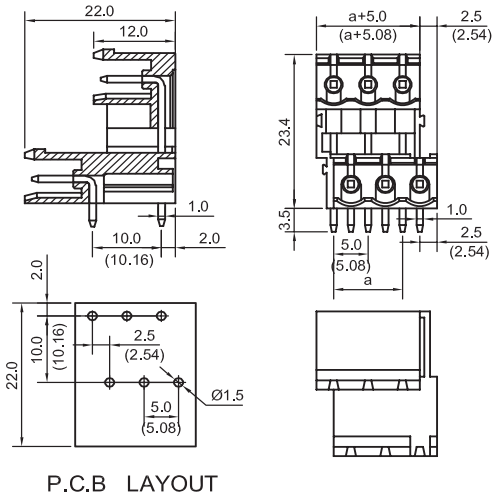

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~3 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

方　针	黄铜镀锡	Policy	: Brass, Tin Plated
塑　件	PA66, UL94V-0	Housing	: PA66, UL94V-0
颜　色	绿色	Color	: Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~ +150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000M Ω DC500V	Insulationt resistance : >5000M Ω DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE120-500M / YE120-508M

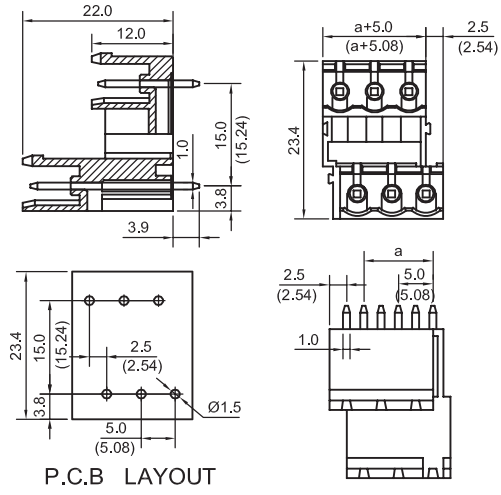

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~3 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

方　针	黄铜镀锡	Policy	: Brass, Tin Plated
塑　件	PA66, UL94V-0	Housing	: PA66, UL94V-0
颜　色	绿色	Color	: Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~ +150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000M Ω DC500V	Insulationt resistance : >5000M Ω DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE130-500 / YE130-508

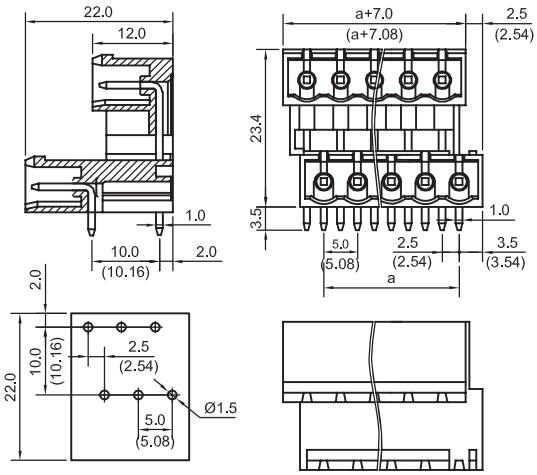

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~24 poles
Approval: CEC

◆ 材质及电镀 ◆ Material

方　针	黄铜镀锡	Policy	Brass, Tin Plated
塑　件	PA66, UL94V–0	Housing	PA66,UL94V–0
颜　色	绿色	Color	Green

◆ 工作环境 ◆ Environmental


操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250°　5秒	Short–time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE13L-500M / YE13L-508M

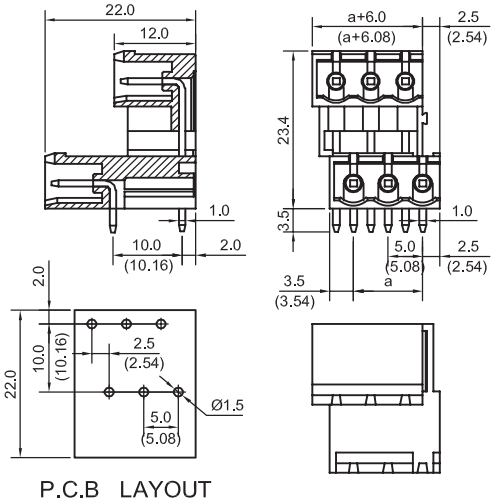

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~3 poles
Approval: CEC

◆ 材质及电镀 ◆ Material

方　针	黄铜镀锡	Policy	Brass, Tin Plated
塑　件	PA66, UL94V–0	Housing	PA66,UL94V–0
颜　色	绿色	Color	Green

◆ 工作环境 ◆ Environmental

操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250°　5秒	Short–time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YE13R-500M / YE13R-508M



Pitch:5.00mm;508mm
Poles: 2~3 poles
Approval:

◆ 材质及电镀 ◆ Material

方　针：黄铜镀锡	Policy : Brass, Tin Plated
塑　件：PA66，UL94V–0	Housing : PA66,UL94V–0
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental

操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250° 5秒	Short–time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000M Ω DC500V	Insulationt resistance : >5000M Ω DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



P.C.B LAYOUT



YE140-500 / YE140-508


Pitch:5.00mm;508mm
Poles: 2~24 poles
Approval:

◆ 材质及电镀 ◆ Material

方　针：黄铜镀锡	Policy : Brass
塑　件：PA66，UL94V–0	Housing
颜　色：绿色	Color

◆ 工作环境


操作温

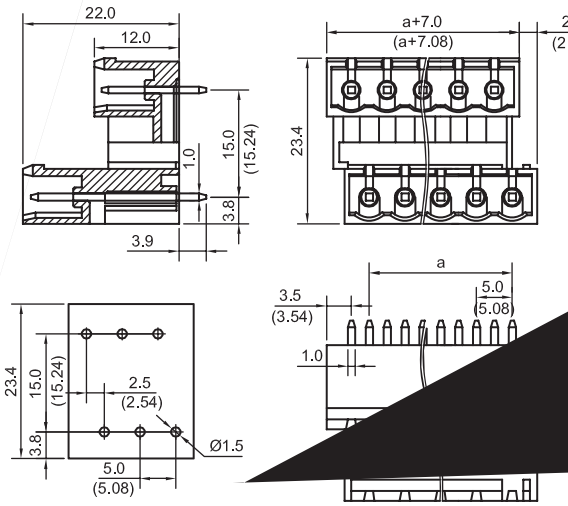

P.C.B LAYOUT



YE14L-500M / YE14L-508M

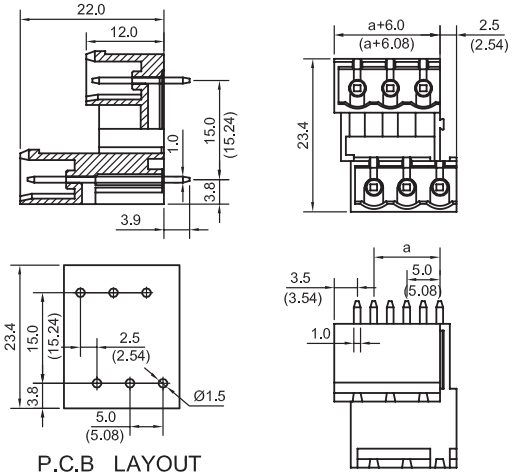

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~3 poles
Approval: CQC


◆ 材质及电镀	◆ Material
方 针：黄铜镀锡	Policy : Brass, Tin Plated
塑 件：PA66，UL94V–0	Housing : PA66,UL94V–0
颜 色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250° 5秒	Short–time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE14R-500M / YE14R-508M

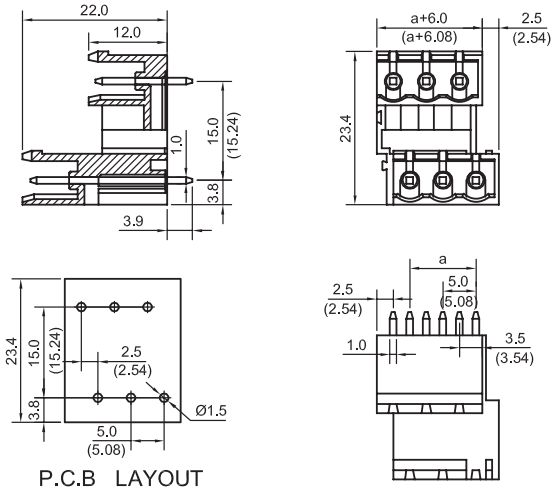

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~3 poles
Approval: CQC

◆ 材质及电镀	◆ Material
方 针：黄铜镀锡	Policy : Brass, Tin Plated
塑 件：PA66，UL94V–0	Housing : PA66,UL94V–0
颜 色：绿色	Color : Green


◆ 工作环境	◆ Environmental
操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250° 5秒	Short–time temperature : +250° for 5 sec

◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YE150-500 / YE150-508

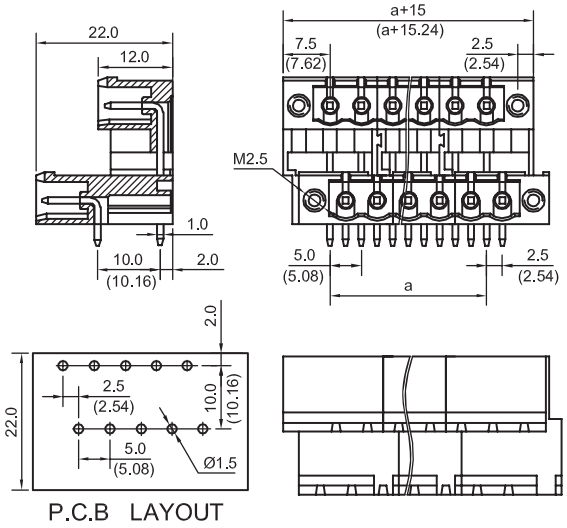

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~24 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

方　针：黄铜镀锡		Policy	: Brass, Tin Plated
塑　件：PA66，UL94V-0		Housing	: PA66,UL94V-0
颜　色：绿色		Color	: Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE160-500 / YE160-508

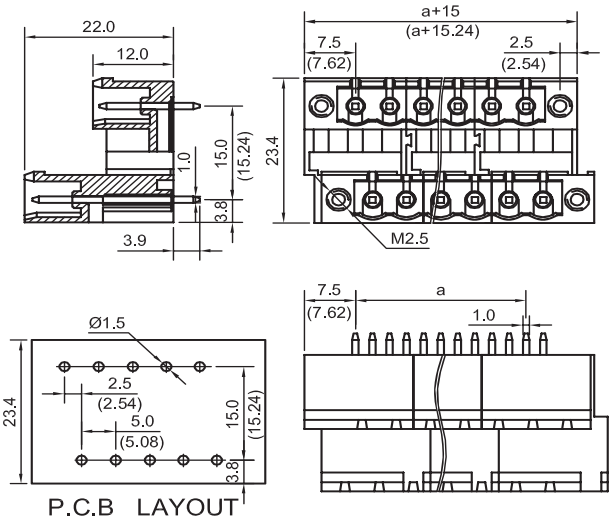

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~24 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

方　针：黄铜镀锡		Policy	: Brass, Tin Plated
塑　件：PA66，UL94V-0		Housing	: PA66,UL94V-0
颜　色：绿色		Color	: Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE210-500M / YE210-508M

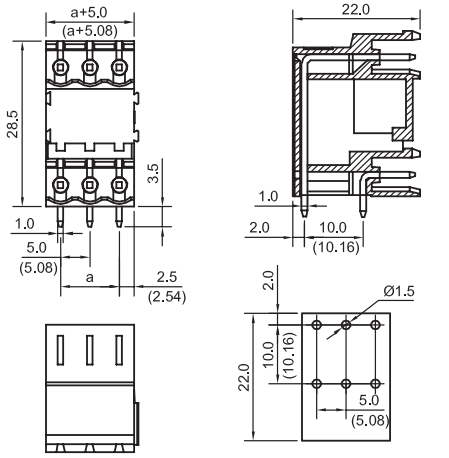

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~3 poles
Approval: CEC

◆ 材质及电镀

方　针：黄铜镀锡
塑　件：PA66，UL94V-0
颜　色：绿色

◆ Material

Policy : Brass, Tin Plated
Housing : PA66,UL94V-0
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250°　5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature : +250° for 5 sec

◆ 电气规格


额定电压：300V
额定电流：16A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min

◆ Electrical

Rated voltage : 300V
Rated current : 16A
Contact resistance : 20m Ω
Insulation t resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min



YE220-500M / YE220-508M

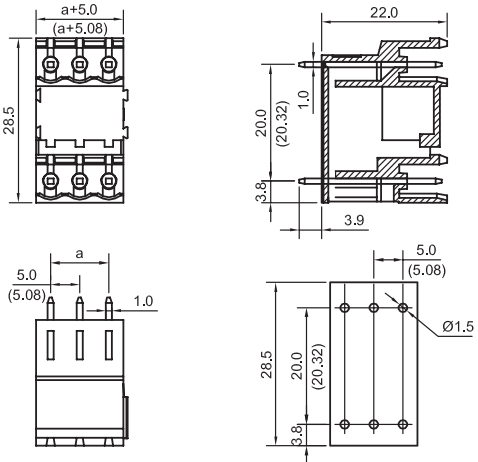

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~3 poles
Approval: CEC

◆ 材质及电镀

方　针：黄铜镀锡
塑　件：PA66，UL94V-0
颜　色：绿色

◆ Material

Policy : Brass, Tin Plated
Housing : PA66,UL94V-0
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250°　5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature : +250° for 5 sec

◆ 电气规格

额定电压：300V
额定电流：16A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min

◆ Electrical

Rated voltage : 300V
Rated current : 16A
Contact resistance : 20m Ω
Insulation t resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min


HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081


n iro e t
电
lectrical

YongXing Termini




YE24L-500M / YE24L-508M

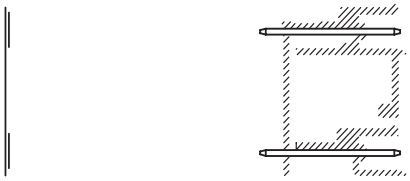





YE250-500 / YE250-508

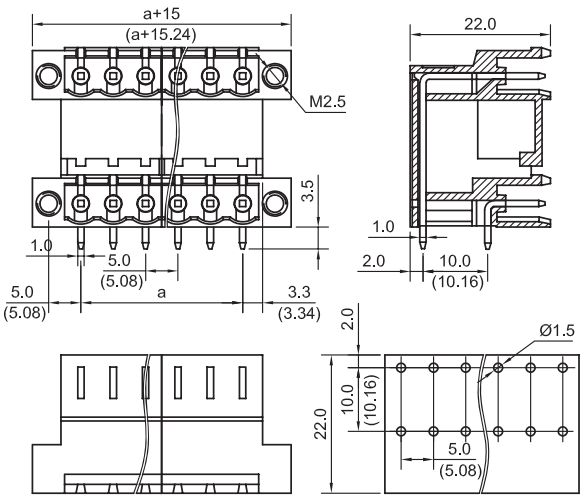

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~24 poles
Approval: CEC

◆ 材质及电镀 ◆ Material

方　针	黄铜镀锡	Policy	Brass, Tin Plated
塑　件	PA66, UL94V-0	Housing	PA66,UL94V-0
颜　色	绿色	Color	Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE260-500 / YE260-508

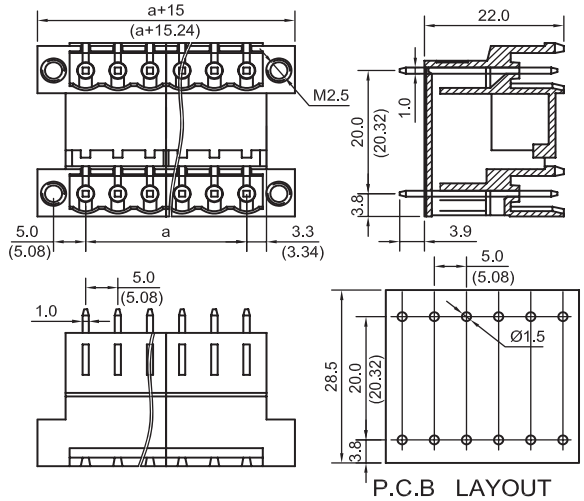

P.C.B LAYOUT

Pitch:5.00mm;508mm
Poles: 2~24 poles
Approval: CEC

◆ 材质及电镀 ◆ Material

方　针	黄铜镀锡	Policy	Brass, Tin Plated
塑　件	PA66, UL94V-0	Housing	PA66,UL94V-0
颜　色	绿色	Color	Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YE330-508

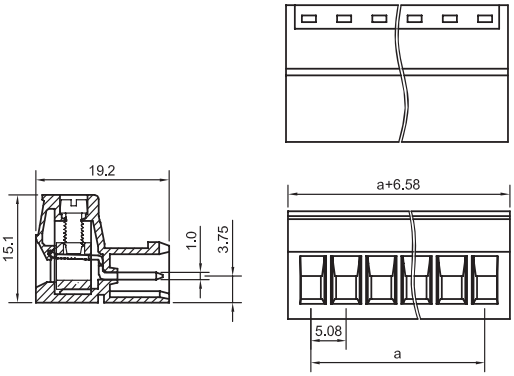

Pitch:5.08mm
Poles: 2~24 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V–0	Housing : PA66,UL94V–0
螺　丝：M3，钢镀锌	Screws : M3steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境 ◆ Environmental


操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250°　5秒	Short–time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24–12AWG 2.5mm²	Wire range : 24–12AWG 2.5mm²
剥线长度：6–7mm	Strip lengath : 6–7mm



YE350-508



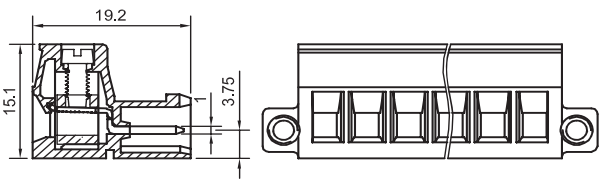

Pitch:5.08mm
Poles: 2~24poles
Approval: CQC

◆ 材质及电镀 ◆ Material

压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V–0	Housing : PA66,UL94V–0
螺　丝：M3，钢镀锌	Screws : M3steel Zinc plated
颜　色：绿色	Color : Green


◆ 工作环境 ◆ Environmental

操作温度：–40° ~+150°	Operation temperature : –40° ~+150°
瞬间温度：+250°　5秒	Short–time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24–12AWG 2.5mm²	Wire range : 24–12AWG 2.5mm²
剥线长度：6–7mm	Strip lengath : 6–7mm

YongXing Terminial Blocks

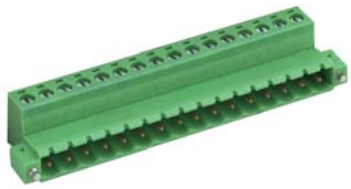

YE370-508

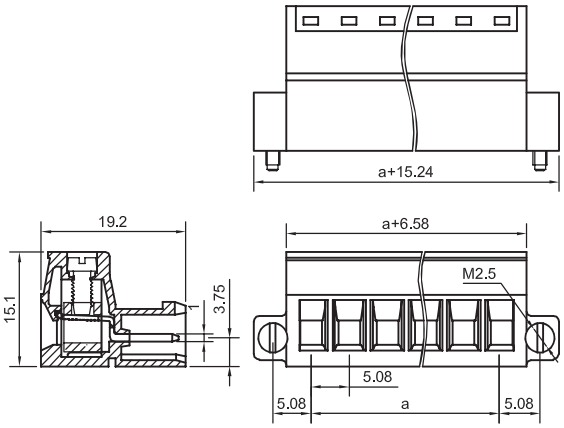

Pitch:5.08mm
Poles: 2~24poles
Approval: CEC


◆ 材质及电镀	◆ Material
压线框：黄铜镀镍	Care clamp : Brass, Ni Plated
插　脚：黄铜镀锡	Contact : Brass,Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66,UL94V-0
螺　丝：M3，钢镀锌	Screws : M3steel Zinc plated
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：24-12AWG 2.5mm²	Wire range : 24-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm



YE510-500 / YE510-508

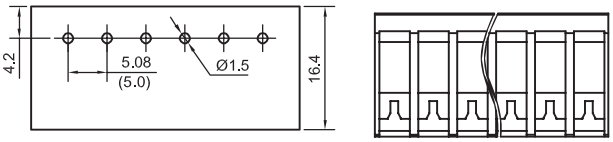

P.C.B LAYOUT

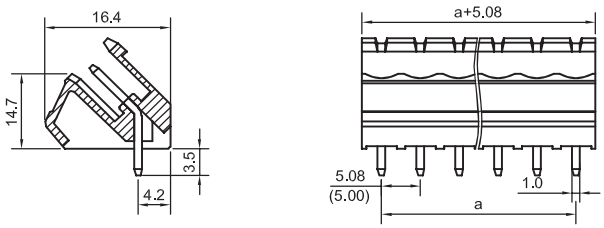

Pitch:5.00mm;5.08mm
Poles: 2~24poles
Approval: CEC

◆ 材质及电镀	◆ Material
方　针：黄铜镀锡	Policy : Brass, Tin Plated
塑　件：PA66，UL94V-0	Housing : PA66,UL94V-0
颜　色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081


YongXing Terminial Blocks




YE530-500 / YE530-508

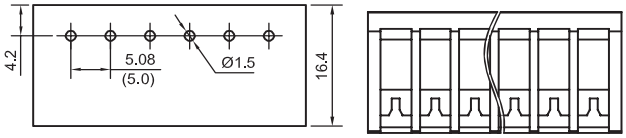

P.C.B LAYOUT






Pitch:5.00mm;508mm
Poles: 2~24 poles
Approval: CQC


◆ 材质及电镀	◆ Material
方 针：黄铜镀锡	Policy : Brass, Tin Plated
塑 件：PA66，UL94V-0	Housing : PA66, UL94V-0
颜 色：绿色	Color : Green


◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YE630-508







Pitch:5.08mm
Poles: 2~24poles
Approval: CQC

◆ 材质及电镀	◆ Material
弹 片：不锈钢	Wire protector : Stainless strip steel
簧 片：黄铜镀锡	Contact : Brass, Tin Plated
塑 件：PA66，UL94V-0	Housing : PA66，UL94V-0
颜 色：绿色	Color : Green

◆ 工作环境	◆ Environmental
操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格	◆ Electrical
额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20mΩ	Contact resistance : 20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：28-12AWG 2.5mm²	Wire range : 28-12AWG 2.5mm²
剥线长度：6-7mm	Strip length : 6-7mm

YongXing Terminial Blocks



YE650-508

Pitch:5.08mm
Poles: 2~24poles
Approval: CQC

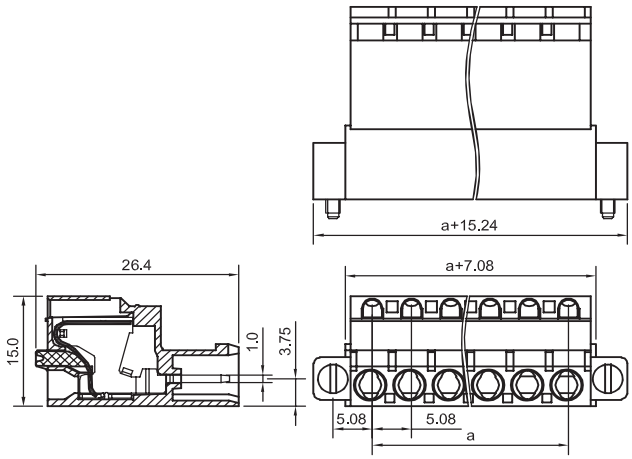

◆ 材质及电镀 ◆ Material

弹　片：不锈钢	Wire protector ：Stainless strip steel
簧　片：黄铜镀锡	Contact ：Brass, Tin Plated
塑　件：PA66，UL94V–0	Housing ：PA66，UL94V–0
颜　色：绿色	Color ：Green

◆ 工作环境 ◆ Environmental


操作温度：–40° ~+150°	Operation temperature ：–40° ~+150°
瞬间温度：+250° 5秒	Short–time temperature：+250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage ：300V
额定电流：16A	Rated current ：16A
接触电阻：20mΩ	Contact resistance ：20mΩ
绝缘电阻：>5000MΩ DC500V	Insulationt resistance：>5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage：AC2000V/1Min
使用线经：28–12AWG 2.5mm²	Wire range ：28–12AWG 2.5mm²
剥线长度：6–7mm	Strip length ：6–7mm




YE350KJ-508

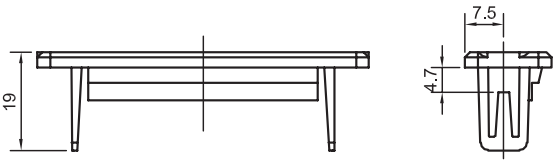


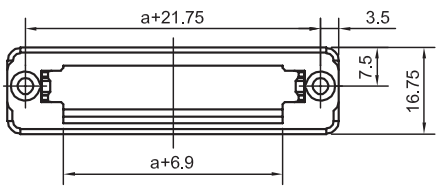



HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YE860-508

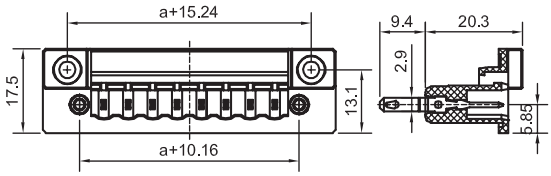



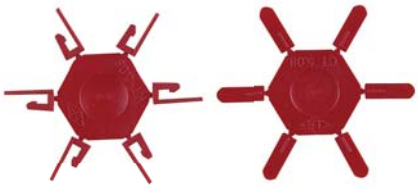

CT-508/KT-508

Pitch:508mm
Poles: 2~24 poles
Approval: CQC

◆ 材质及电镀 ◆ Material

插　脚：黄铜镀锡		Contact	: Brass, Tin Plated
塑　件：PA66，UL94V-0		Housing	: PA66,UL94V-0
颜　色：绿色		Color	: Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：16A	Rated current : 16A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min



YX122-508

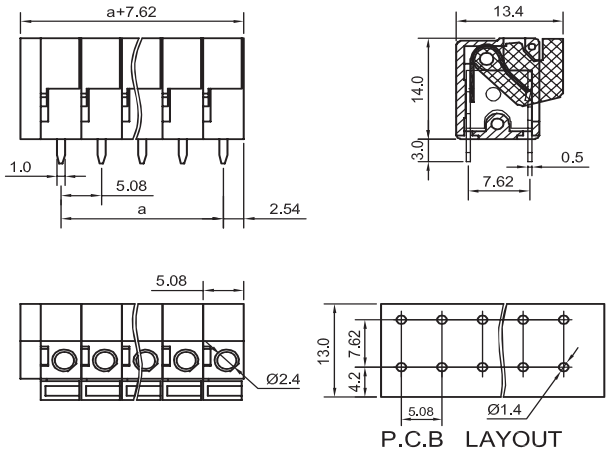

Pitch:5.08mm
Poles: 2~16 poles
Approval: CQC

◆ 材质及电镀

弹　片：不锈钢
插　脚：黄铜镀锡
塑　件：PA66，UL94V-0
颜　色：绿色

◆ Material

Wire protector : Stainless strip steel
Contact : Brass,Tin Plated
Housing : PA66，UL94V-0
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250° 5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature : +250° for 5 sec

◆ 电气规格


额定电压：300V
额定电流：10A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min
使用线经：22-14AWG 1.5mm²
剥线长度：6-7mm

◆ Electrical

Rated voltage : 300V
Rated current : 10A
Contact resistance : 20mΩ
Insulationt resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 22-14AWG 1.5mm²
Strip length : 6-7mm



YX122-762

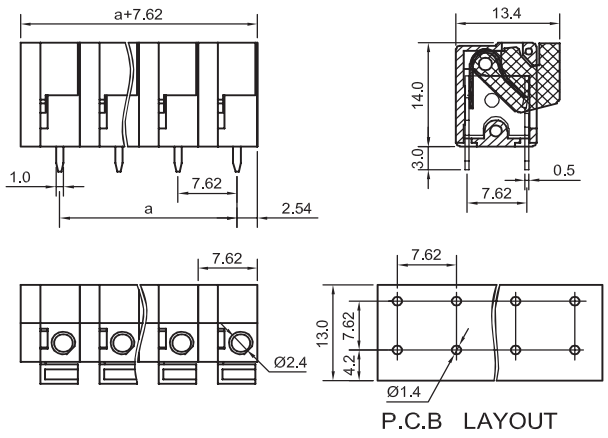

Pitch:7.62mm
Poles: 2~16 poles
Approval: CQC

◆ 材质及电镀

弹　片：不锈钢
插　脚：黄铜镀锡
塑　件：PA66，UL94V-0
颜　色：绿色

◆ Material

Wire protector : Stainless strip steel
Contact : Brass,Tin Plated
Housing : PA66，UL94V-0
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250° 5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature : +250° for 5 sec

◆ 电气规格

额定电压：300V
额定电流：10A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min
使用线经：22-14AWG 1.5mm²
剥线长度：6-7mm

◆ Electrical


Rated voltage : 300V
Rated current : 10A
Contact resistance : 20mΩ
Insulationt resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 22-14AWG1.5mm²
Strip length : 6-7mm

HTTP://www.yxswitch.com
TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081



YX122-016

Pitch:10.16mm
Poles: 2~16 poles
Approval: CQC

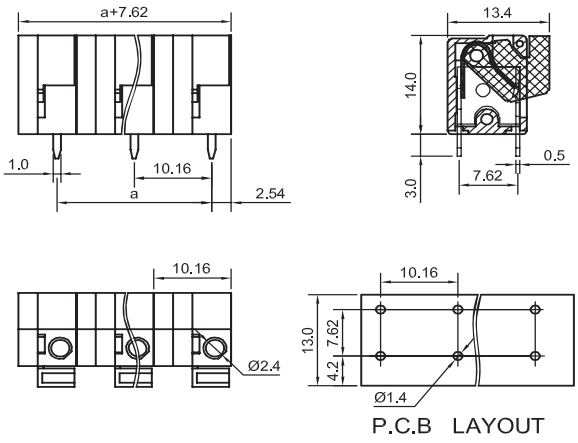

◆ 材质及电镀 ◆ Material

弹 片：不锈钢	Wire protector : Stainless strip steel
插 脚：黄铜镀锡	Contact : Brass,Tin Plated
塑 件：PA66，UL94V-0	Housing : PA66，UL94V-0
颜 色：绿色	Color : Green

◆ 工作环境 ◆ Environmental

操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec


◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：22-14AWG 1.5mm^2	Wire range : 22-14AWG 1.5mm^2
剥线长度：6-7mm	Strip length : 6-7mm



YX222-508

Pitch:5.08mm
Poles: 2~16 poles
Approval: CQC

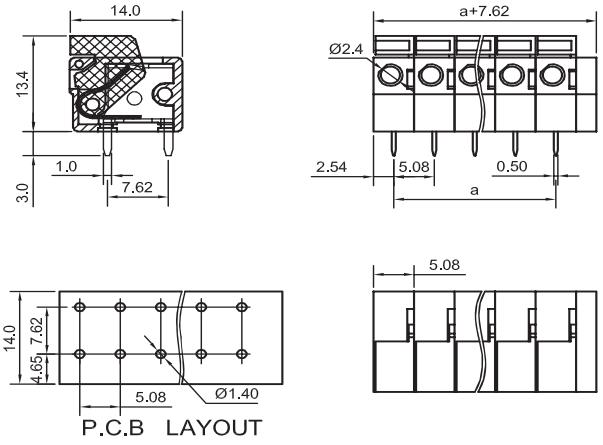

◆ 材质及电镀 ◆ Material

弹 片：不锈钢	Wire protector : Stainless strip steel
插 脚：黄铜镀锡	Contact : Brass,Tin Plated
塑 件：PA66，UL94V-0	Housing : PA66，UL94V-0
颜 色：绿色	Color : Green

◆ 工作环境 ◆ Environmental


操作温度：-40° ~+150°	Operation temperature : -40° ~+150°
瞬间温度：+250° 5秒	Short-time temperature : +250° for 5 sec

◆ 电气规格 ◆ Electrical

额定电压：300V	Rated voltage : 300V
额定电流：10A	Rated current : 10A
接触电阻：20m Ω	Contact resistance : 20m Ω
绝缘电阻：>5000MΩ DC500V	Insulationt resistance : >5000MΩ DC500V
耐 电 压：AC2000V/1Min	Withstanding voltage : AC2000V/1Min
使用线经：22-14AWG 1.5mm^2	Wire range : 22-14AWG 1.5mm^2
剥线长度：6-7mm	Strip length : 6-7mm



YX222-762

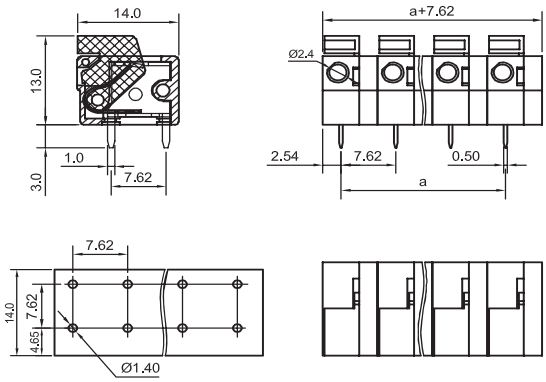

P.C.B LAYOUT

Pitch:7.62mm
Poles: 2~16 poles
Approval: CEC

◆ 材质及电镀

弹　片：不锈钢
插　脚：黄铜镀锡
塑　件：PA66，UL94V-0
颜　色：绿色

◆ Material

Wire protector : Stainless strip steel
Contact : Brass,Tin Plated
Housing : PA66，UL94V-0
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250°　5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature : +250° for 5 sec

◆ 电气规格


额定电压：300V
额定电流：10A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min
使用线经：22-14AWG 1.5mm²
剥线长度：6-7mm

◆ Electrical

Rated voltage : 300V
Rated current : 10A
Contact resistance : 20mΩ
Insulationt resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 22-14AWG 1.5mm²
Strip length : 6-7mm



YX222-016

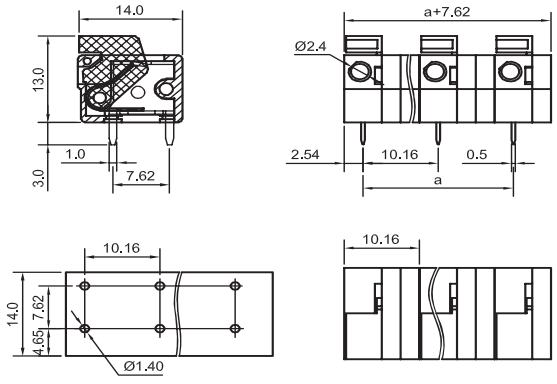

P.C.B LAYOUT

Pitch:10.16mm
Poles: 2~16 poles
Approval: CEC

◆ 材质及电镀

弹　片：不锈钢
插　脚：黄铜镀锡
塑　件：PA66，UL94V-0
颜　色：绿色

◆ Material

Wire protector : Stainless strip steel
Contact : Brass,Tin Plated
Housing : PA66，UL94V-0
Color : Green

◆ 工作环境

操作温度：-40° ~+150°
瞬间温度：+250°　5秒

◆ Environmental

Operation temperature : -40° ~+150°
Short-time temperature : +250° for 5 sec

◆ 电气规格

额定电压：300V
额定电流：10A
接触电阻：20mΩ
绝缘电阻：>5000MΩ DC500V
耐 电 压：AC2000V/1Min
使用线经：22-14AWG 1.5mm²
剥线长度：6-7mm

◆ Electrical

Rated voltage : 300V
Rated current : 10A
Contact resistance : 20mΩ
Insulationt resistance : >5000MΩ DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 22-14AWG 1.5mm²
Strip length : 6-7mm

HTTP://www.yxswitch.com TEL 86-021-57629125\ 57629126 FAX 86-021-57629089
TEL 86-021-57629081\ 57629082 FAX 86-021-57629081